




**Blue Elephant**  
Zhongshan Dalanxiang Lighting Co., Ltd.

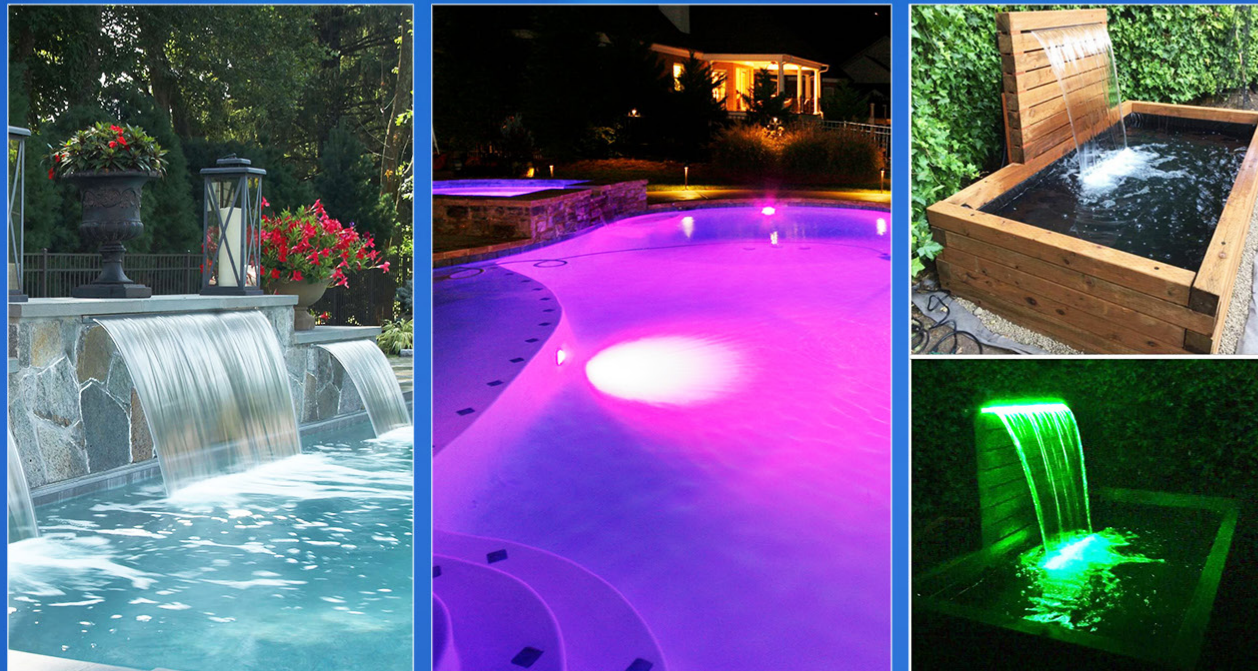

## Zhongshan Dalanxiang Lighting Co., Ltd.

Tel/Wechat: 18024289967 / +86-0760-87569011

E-mail: blueelephant01@jkd123.com

Web: <https://dlxlighting.en.alibaba.com>

Add: No. 18 Yong 'an Road, Caoyi Industrial Zone, Guzhen, Zhongshan, Guangdong, China



Scan the code to enter  
the store for more  
product details

水下照明生产厂家

**Underwater lighting manufacturer**

Over 10 years experience in pool lighting production





Company Profile

Is professional in production of underwater LED lamps. we have advance techinal face and advance equipment and workmanship.also we had got the ROHS, IP68,CE,FCC. certification pass the ISO 9001, ISO 2000 system.

We are professionally engaged in manufacture of various kind of underwater LED lamps over 10 years . Product include wall mounted stainless steel hanging lights, plastic,full-sealed ,PAR cups and LED lamps. Light source effects, multi color, Monochrome, internal control,gradient,external control DMX512, synchronous colorful, power off mode control, four button,six button, eighteen key single on one remote control and colorful effects are available,and are widely used in swimming pools. Fountain water pool, secenic lighting, villa pool, garden view, family aquarium etc. For example:plastic farm. There are 8 injection machine for our won plastic parts and shell. with 3 assembly line for products manufacture and output is 1500-2000 pcs in a line at per day. Our QC make all inspection for the products on line. Mainly maket is Russa. American, U.K, Australia, Germany and so on.

There are strict quality control system in factory . covering material supplying ecalution incoming material inspection. Evaluation classification and warehouse storage as well as production quality control.With perfect production process,advanced manufacturing technique strict inspection methods and good service we have a high reputation among the client. If you have interested in our products we are glad to welcome you to vist our website and our Alibaba

<https://dlxlighting.en.alibaba.com>


Company Qualification




Factory Photo




Wiring diagram of pool light

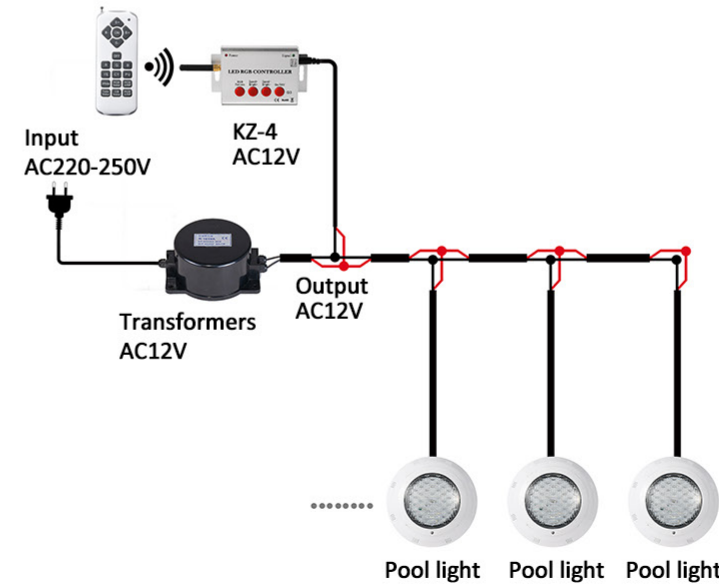


Wiring diagram of pool light

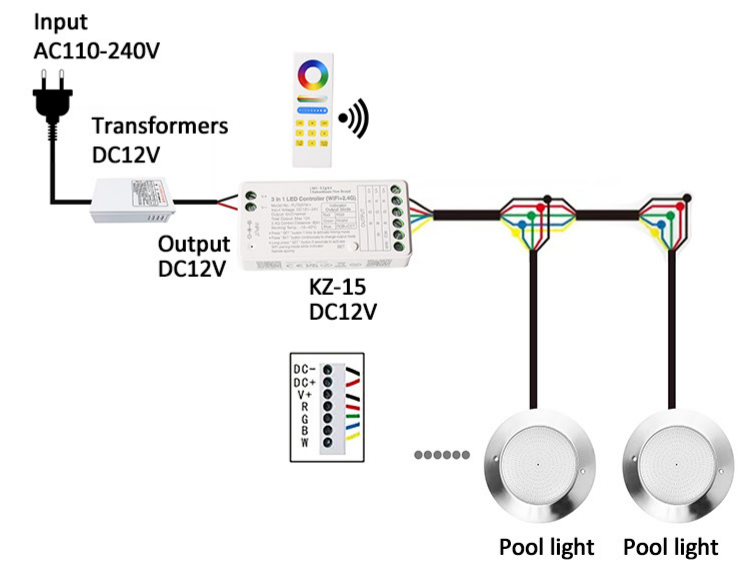

Wiring diagram of pool light

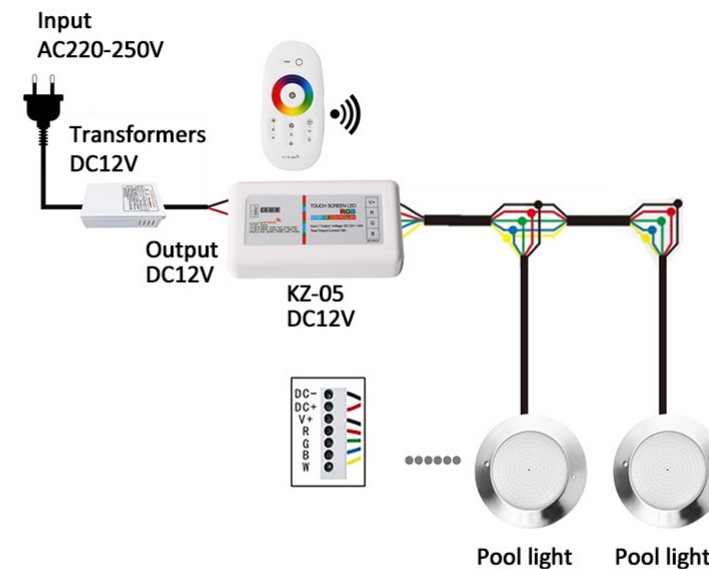


Wiring diagram of pool light

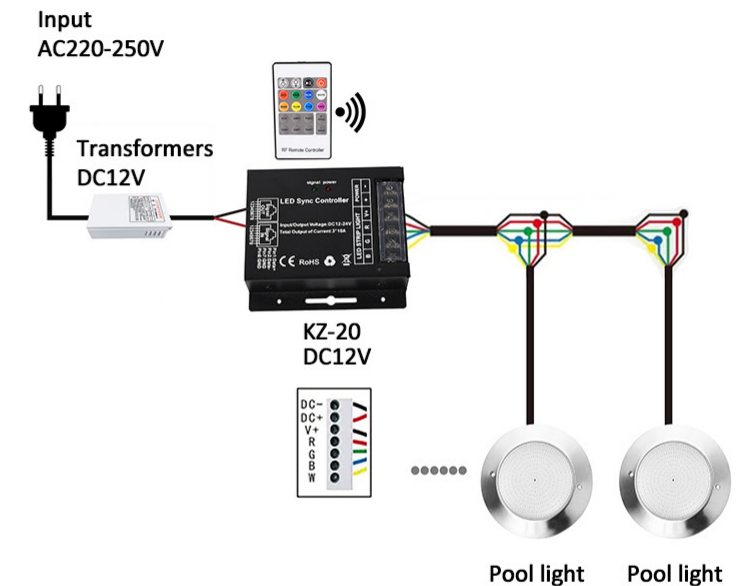





**MODEL:DLX-YC280-AP**

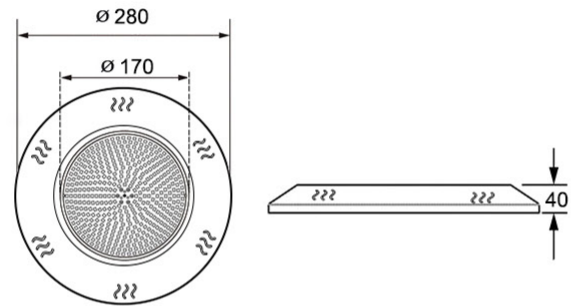


-  Lamp lifetime ≥50,000H
-  Working temperature -20°C-40°C
-  Waterproof IP68
-  Easy installation
-  High CRI
-  CE
-  RoHS
-  FC

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Resin Filled Wall Mounted LED Pool Light	DLX-YC280-AP	D280*H40	SMD LED	18W	AC12V	Irradiation area widen The light is downy and No dazzling	ABS+Resin filled
				25W			
				35W			



**MODEL:DLX-YC260-AP**

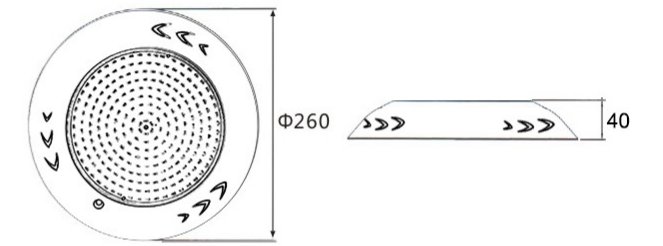


-  Lamp lifetime ≥50,000H
-  Working temperature -20°C-40°C
-  Waterproof IP68
-  Easy installation
-  High CRI
-  CE
-  RoHS
-  FC

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Resin Filled Wall Mounted LED Pool Light	DLX-YC260-AP	D260*H40	SMD LED	18W	AC12V	Irradiation area widen The light is downy and No dazzling	ABS+Resin filled
				25W			
				35W			





MODEL:DLX-YC220-AP

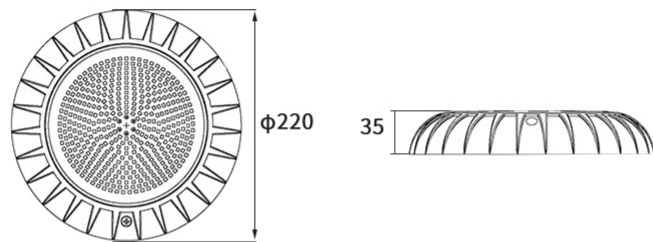


-  Lamp lifetime  $\geq 50,000\text{H}$
-  Working temperature  $-20^{\circ}\text{C}\sim 40^{\circ}\text{C}$
-  Waterproof IP68
-  Easy installation
-  High CRI
-  CE
-  RoHS
-  FC

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Resin Filled Wall Mounted LED Pool Light	DLX-YC220-AP	D220*H35	SMD LED	18W	AC12V	Irradiation area widen The light is downy and No dazzling	ABS+Resin filled
				25W			
				35W			




MODEL:DLX-YC230-AP

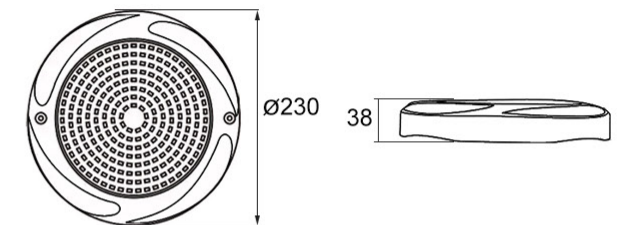

-  Lamp lifetime  $\geq 50,000\text{H}$
-  Working temperature  $-20^{\circ}\text{C}\sim 40^{\circ}\text{C}$
-  Waterproof IP68
-  Easy installation
-  High CRI
-  CE
-  RoHS
-  FC

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Resin Filled Wall Mounted LED Pool Light	DLX-YC230-AP	D230*H38	SMD LED	18W	AC12V	Irradiation area widen The light is downy and No dazzling	ABS+Resin filled
				25W			
				35W			




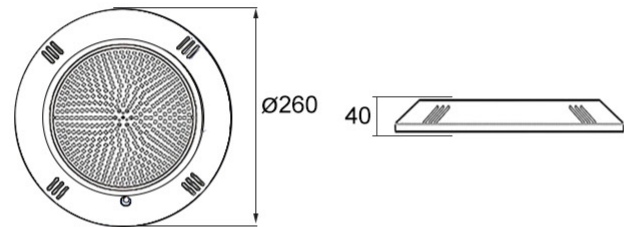

**MODEL:DLX-YC260-2AP**

-  Lamp lifetime ≥50,000H
-  Working temperature -20°C~40°C
-  Waterproof IP68
-  Easy installation
-  High CRI
-  CE
-  RoHS
-  FCC

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Resin Filled Wall Mounted LED Pool Light	DLX-YC260-2AP	D260*H40	SMD LED	18W	AC12V	Irradiation area widen The light is downy and No dazzling	ABS+Resin filled
				25W			
				35W			

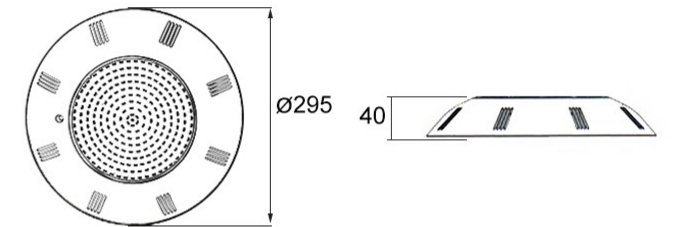

**MODEL:DLX-YC295-AP**

-  Lamp lifetime ≥50,000H
-  Working temperature -20°C~40°C
-  Waterproof IP68
-  Easy installation
-  High CRI
-  CE
-  RoHS
-  FCC

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Resin Filled Wall Mounted LED Pool Light	DLX-YC295-AP	D295*H40	SMD LED	18W	AC12V	Irradiation area widen The light is downy and No dazzling	ABS+Resin filled
				25W			
				35W			






MODEL:DLX-GJ110-AP

MODEL:DLX-GJ150-AP

MODEL:DLX-GJ230-AP

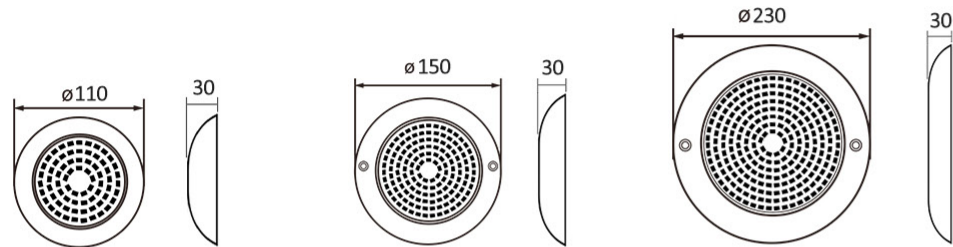

- Lamp lifetime ≥50,000H
- Working temperature -20°C-40°C
- Waterproof IP68
- Easy installation
- High CRI
- 
- 
- 

**Installation Steps**

- Screw the lamp body to the wall of the sink
- The use of under-water cable gland is strongly recommended for connecting wire to AC12V transformer without opening (lamps cannot be directly connected to 110V or 220V power supply)

*Please install the lamp under water under the guidance of a professional electrician.*


Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Resin Filled Wall Mounted LED Pool Light	DLX-GJ110-AP	D110*H30	SMD LED	6W	AC12V	Irradiation area widen The light is downy and No dazzling	ABS+Resin filled
	DLX-GJ150-AP	D150*H30		12W			
	DLX-GJ230-AP	D230*H30		18W			
				25W			
			35W				




MODEL:DLX-UT90-AP

MODEL:DLX-UT160-AP

MODEL:DLX-UT230-AP

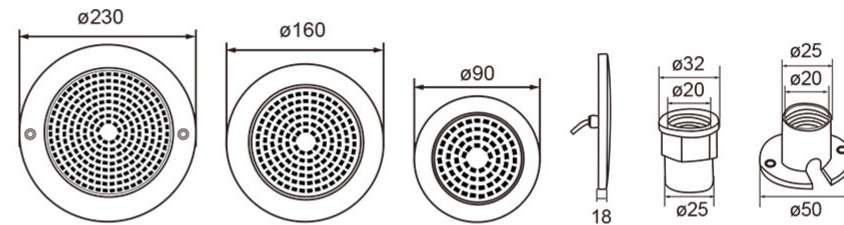

- Lamp lifetime ≥50,000H
- Working temperature -20°C-40°C
- Waterproof IP68
- Easy installation
- High CRI
- 
- 
- 

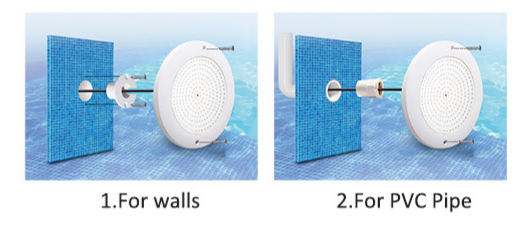

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Resin Filled Wall Mounted LED Pool Light	DLX-UT90-AP	D90*H18	SMD LED	6W	AC12V	Irradiation area widen The light is downy and No dazzling	ABS+Resin filled
	DLX-UT160-AP	D160*H18		12W			
	DLX-UT230-AP	D230*H18		18W			
				25W			
			35W				







MODEL:DLX-YC300-SP



MODEL:DLX-YC230-SP

MODEL:DLX-YC300-SP  
DLX-YC230-SP

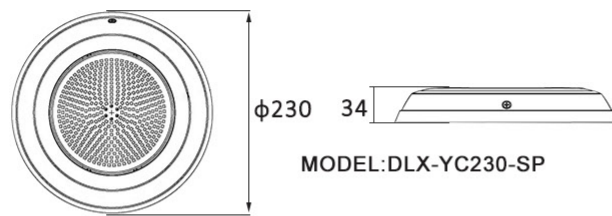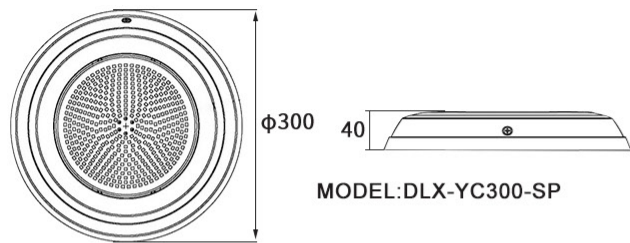

-  Lamp lifetime  $\geq 50,000\text{H}$
-  Working temperature  $-20^{\circ}\text{C}\sim 40^{\circ}\text{C}$
-  Waterproof IP68
-  Easy installation
-  High CRI
- 
- 
- 

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Resin Filled Wall Mounted LED Pool Light	DLX-YC230-SP	D230*H34	SMD LED	12W	AC12V	Irradiation area widen The light is downy and No dazzling	Stainless Steel 304+Resin filled
				18W			
	DLX-YC300-SP	D300*H40		12W			
				18W			
				25W			
				35W			





MODEL:DLX-YC300-SWP



MODEL:DLX-YC230-SWP

MODEL:DLX-YC300-SWP  
DLX-YC230-SWP

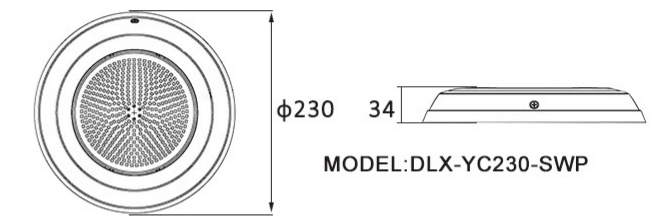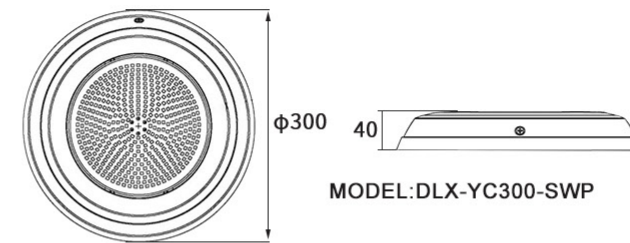


-  Lamp lifetime  $\geq 50,000\text{H}$
-  Working temperature  $-20^{\circ}\text{C}\sim 40^{\circ}\text{C}$
-  Waterproof IP68
-  Easy installation
-  High CRI
- 
- 
- 

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Resin Filled Wall Mounted LED Pool Light	DLX-YC230-SWP	D230*H34	SMD LED	12W	AC12V	Irradiation area widen The light is downy and No dazzling	Stainless Steel 304+Resin filled
				18W			
	DLX-YC300-SWP	D300*H40		12W			
				18W			
				25W			
				35W			





**MODEL:DLX-YC260-2SP**

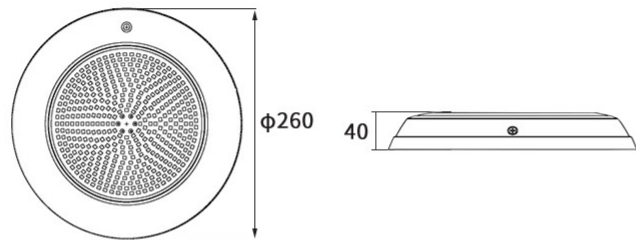

- Lamp lifetime ≥50,000H
- Working temperature -20°C~40°C
- Waterproof IP68
- Easy installation
- High CRI
- CE
- RoHS
- FCC



Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Resin Filled Wall Mounted LED Pool Light	DLX-YC260-2SP	D260*H40	SMD LED	18W	AC12V	Irradiation area widen The light is downy and No dazzling	Stainless Steel 304+Resin filled
				25W			
				35W			



**MODEL:  
DLX-YC260-SP**

**MODEL:  
DLX-YC290-SP**

**MODEL:DLX-YC260-SP  
DLX-YC290-SP**

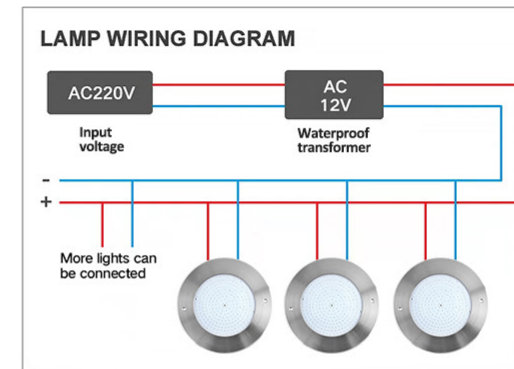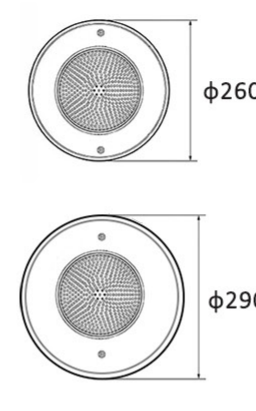

- Lamp lifetime ≥50,000H
- Working temperature -20°C~40°C
- Waterproof IP68
- Easy installation
- High CRI
- CE
- RoHS
- FCC

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Resin Filled Wall Mounted LED Pool Light	DLX-YC260-SP	D260*H30	SMD LED	18W	AC12V	Irradiation area widen The light is downy and No dazzling	Stainless Steel 304+Resin filled
				25W			
				35W			
	DLX-YC290-SP	D290*H30					





**MODEL:DLX-UT250-SP**

**Installation Steps**

- Screw the lamp body to the wall of the sink.
- The use of underwater cable gland is strongly recommended for connecting wire to DC12V transformer without opening (lamps cannot be directly connected to 110V or 220V power supply)

*Please install the lamp under water under the guidance of a professional electrician*

**Wiring diagram**

RGB multicolor (4-wire external control)

Single Color

More lights can be connected

- Lamp lifetime ≥50,000H
- Working temperature -20°C~40°C
- Waterproof IP68
- Easy installation
- High CRI
- 
- 
- 

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Ultra-thin Resin LED Swimming Pool Light	DLX-UT250-SP	D250*H10	SMD LED	18W	DC12V	Irradiation area widen The light is downy and No dazzling	Stainless Steel 304+Resin filled +PC transparent cover
				25W			
				35W			



**MODEL:DLX-UT250-2SP**

**Installation Steps**

- Drill a hole.
- Screw the lamp body to the wall of the sink. Fix the screws. The use of underwater cable gland is strongly recommended for connecting wire to AC12V transformer without opening (lamps cannot be directly connected to 110V or 220V power supply)

*Please install the lamp under water under the guidance of a professional electrician*

**LAMP WIRING DIAGRAM**

More lights can be connected


- Lamp lifetime ≥50,000H
- Working temperature -20°C~40°C
- Waterproof IP68
- Easy installation
- High CRI
- 
- 
- 

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Ultra-thin Resin LED Swimming Pool Light	DLX-UT250-2SP	D250*H27	SMD LED	18W	AC12V DC12V	Irradiation area widen The light is downy and No dazzling	Stainless Steel 304+Resin filled +PC transparent cover
				25W			
				35W			





MODEL:DLX-UT110-SP    MODEL:DLX-UT160-SP    MODEL:DLX-UT230-SP    MODEL:DLX-UT280-SP

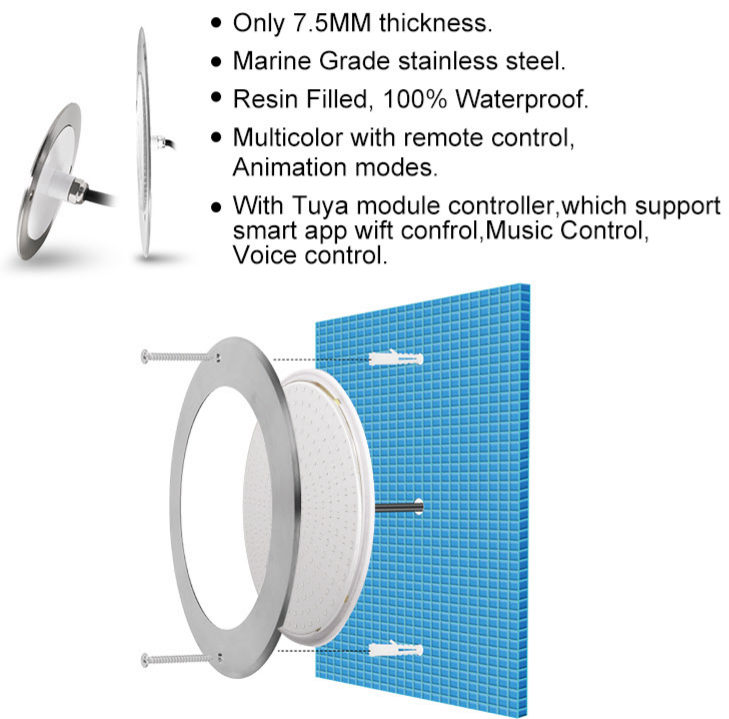

- Only 7.5MM thickness.
- Marine Grade stainless steel.
- Resin Filled, 100% Waterproof.
- Multicolor with remote control, Animation modes.
- With Tuya module controller, which support smart app with control, Music Control, Voice control.

### Multi Control Methods

01  
2.4G RF remote control

02  
Smart control of mobile app

03  
Music Sound Control

04  
Voice control

16 Millions of colors to choose

Dynamic mode Static mode

Timing setting

Group control

WiFi wireless control support long-range control

Smart Life

Google Assistant

amazon alexa



MODEL:DLX-UT110-SP






MODEL:DLX-UT160-SP



MODEL:DLX-UT230-SP



MODEL:DLX-UT280-SP

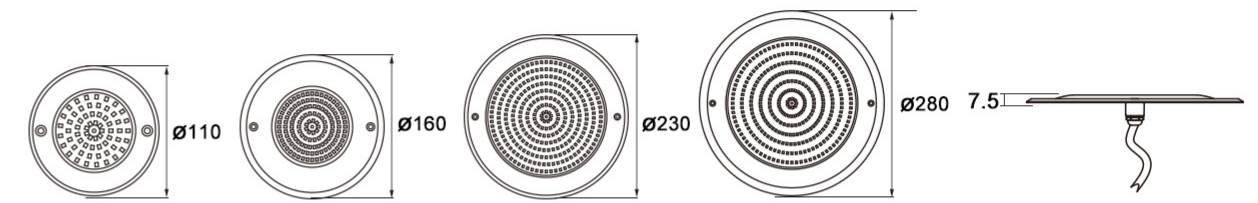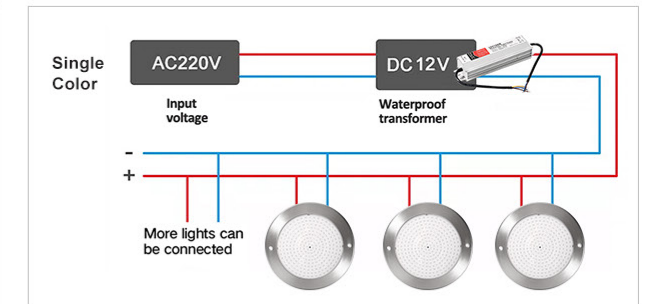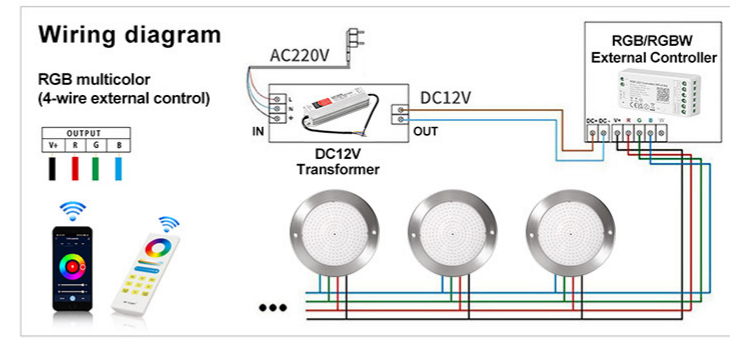

- Lamp lifetime ≥50,000H
- Working temperature -20°C~40°C
- Waterproof IP68
- Easy installation
- High CRI
- 
- 
- 


Product	Model	Size(mm)	Power	Light Source	Working Voltage	Lighting effects	Body Material
Ultra-thin Resin LED Swimming Pool Light	DLX-UT110-SP	D110*H7.5	6W	SMD LED	DC12V	Irradiation area widen The light is downy and No dazzling	Stainless Steel 304/316 +Resin filled +PC transparent cover
	DLX-UT160-SP	D160*H7.5	12W				
	DLX-UT230-SP	D230*H7.5	18W				
			25W				
			35W				
	DLX-UT280-SP	D280*H7.5	18W				
			25W				






**MODEL:DLX-UT230-2SP**

- 1 Drill a hole.
- 2 Screw the lamp body to the wall of the sink, Fix the screws.  
The use of underwater cable gland is strongly recommended for connecting wire to AC12V transformer (lamps cannot be directly connected to 110V or 220V power supply)



Please install the lamp under water under the guidance of a professional electrician

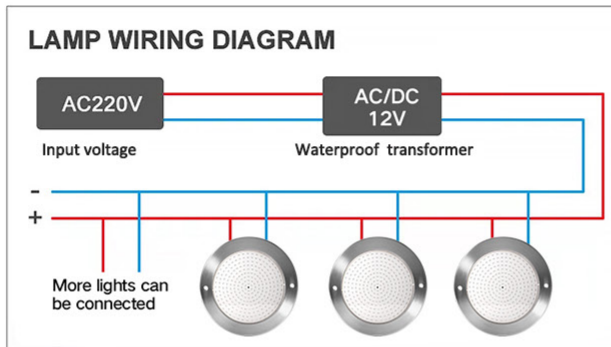

**MODEL:DLX-UT110-2SP**




**MODEL:DLX-UT160-2SP**



**MODEL:DLX-UT230-2SP**



**MODEL:DLX-UT280-2SP**

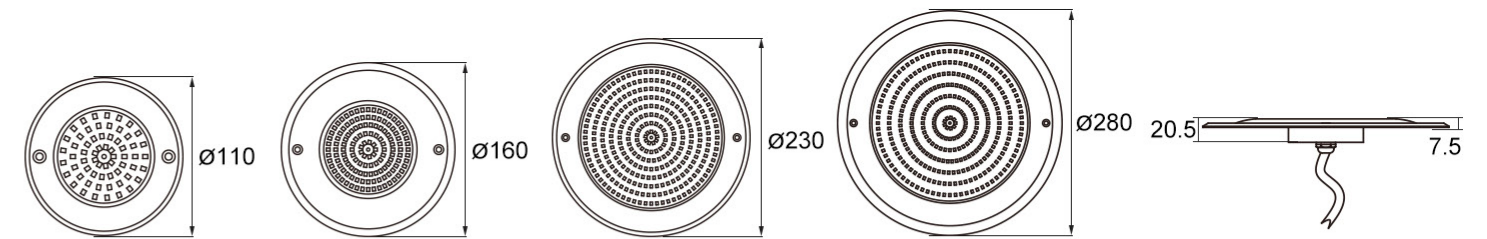



- Lamp lifetime ≥50,000H
- Working temperature -20°C~40°C
- Waterproof IP68
- Easy installation
- High CRI
- CE
- RoHS
- FC

Product	Model	Size(mm)	Power	Light Source	Working Voltage	Lighting effects	Body Material
Ultra-thin Resin LED Swimming Pool Light	DLX-UT110-2SP	D110*H20.5	6W	SMD LED	AC12V DC12V	Irradiation area widen The light is downy and No dazzling	Stainless Steel 304/316 +Resin filled +PC transparent cover
	DLX-UT160-2SP	D160*H20.5	12W				
	DLX-UT230-2SP	D230*H20.5	18W				
			25W				
			35W				
	DLX-UT280-2SP	D280*H20.5	18W				
			25W				





MODEL:DLX-UT250-AP

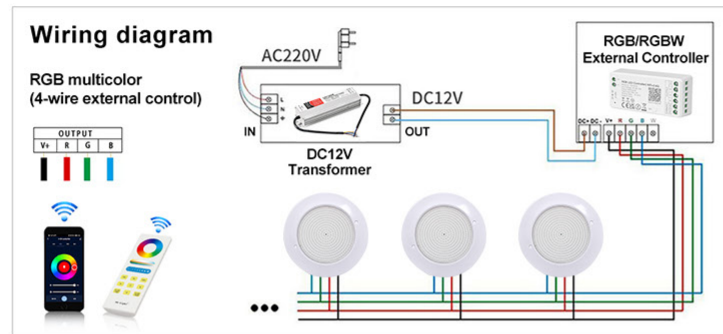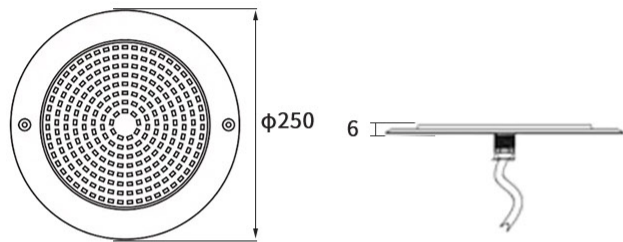


- Lamp lifetime  $\geq 50,000\text{H}$
- Working temperature  $-20^{\circ}\text{C}\sim 40^{\circ}\text{C}$
- Waterproof IP68
- Easy installation
- High CRI
- 
- 
- 

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Ultra-thin Resin LED Swimming Pool Light	DLX-UT250-AP	D250*H6	SMD LED	12W	DC12V	Irradiation area widen The light is downy and No dazzling	ABS+Resin filled
				18W			
				25W			
				35W			
				35W			



MODEL:DLX-YC295-A

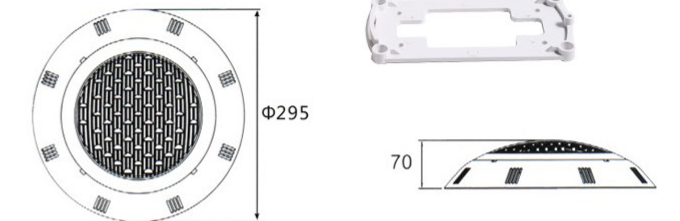


- Lamp lifetime  $\geq 50,000\text{H}$
- Working temperature  $-20^{\circ}\text{C}\sim 40^{\circ}\text{C}$
- Waterproof IP68
- Easy installation
- High CRI
- 
- 
- 

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Wall mounted pool lamp	DLX-YC295-A	D295*H70	1PCS/W High Power LED / SMD LED	12W	AC12V	Irradiation long distance and Concentrated light / Irradiation area widen The light is downy and No dazzling	ABS+PC
				18W			
				24W			
				25W			
				35W			
				45W			





**MODEL:DLX-YC260-A**

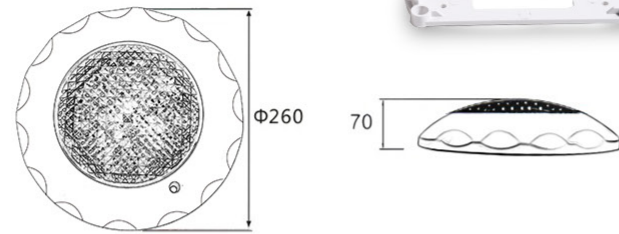

- Lamp lifetime ≥50,000H
- Working temperature -20°C~40°C
- Waterproof IP68
- Easy installation
- High CRI
- CE
- RoHS
- FC

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Wall mounted pool lamp	DLX-YC260-A	D260*H70	1PCS/W High Power LED / SMD LED	12W	AC12V	Irradiation long distance and Concentrated light / Irradiation area widen The light is downy and No dazzling	ABS+PC
				18W			
				24W			
				25W			
				35W			
				45W			




MODEL:DLX-YC295-2A


**MODEL:DLX-YC295-2A  
DLX-YC230-2A**



MODEL:DLX-YC230-2A

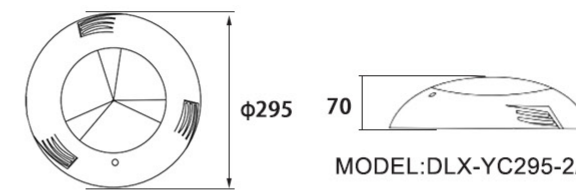

MODEL:DLX-YC295-2A

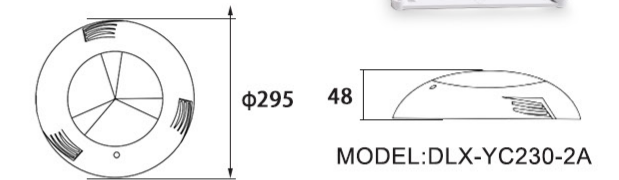


MODEL:DLX-YC230-2A


- Lamp lifetime ≥50,000H
- Working temperature -20°C~40°C
- Waterproof IP68
- Easy installation
- High CRI
- CE
- RoHS
- FC

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Wall mounted pool lamp	DLX-YC230-2A	D230*H48	1PCS/W High Power LED / SMD LED	6W	AC12V	Irradiation long distance and Concentrated light / Irradiation area widen The light is downy and No dazzling	ABS+PC
				9W			
				12W			
				12W			
				18W			
	DLX-YC295-2A	D295*H70	SMD LED	24W			
				25W			
				35W			
				35W			
				45W			



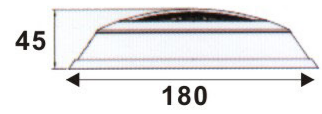


MODEL: DLX-YC180-S

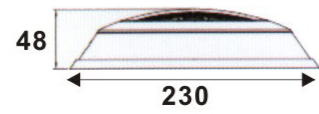


MODEL: DLX-YC230-S



MODEL: DLX-YC300-S

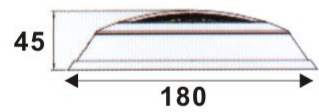


MODEL: DLX-YC180-SW

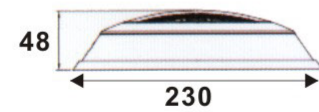

MODEL: DLX-YC230-SW



MODEL: DLX-YC300-SW

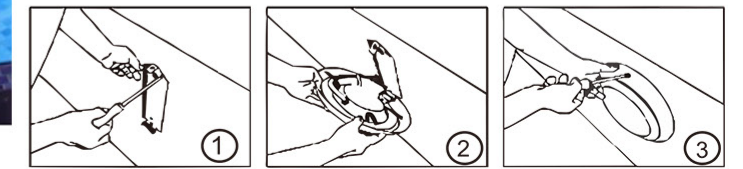


Product	Model	Size(mm)	Power	Light Source	Working Voltage	Lighting effects	Body Material	
Wall mounted pool lamp	DLX-YC180-S(Blue) DLX-YC180-SW (White)	D180*H45	3W	1PCS/W High Power LED  / SMD LED	AC12V	Irradiation long distance and Concentrated light  /  Irradiation area widen The light is downy and No dazzling	Stainless Steel 304/316	
			6W					
			9W					
	DLX-YC230-S(Blue) DLX-YC230-SW (White)	D230*H48	6W					
			9W					
			12W					
	DLX-YC300-S(Blue) DLX-YC300-SW (White)	D300*H70	18W					
			24W					
			25W					
			35W					
			36W					
			45W					
								18*3W





**MODEL:DLX-YC230-A**

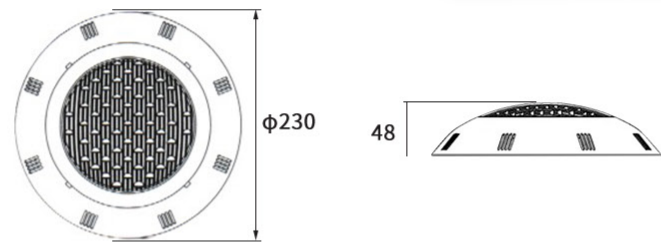


-  Lamp lifetime  $\geq 50,000\text{H}$
-  Working temperature  $-20^{\circ}\text{C}\sim 40^{\circ}\text{C}$
-  Waterproof IP68
-  Easy installation
-  High CRI
- 
- 
- 

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Luminous color	Body Material
wall mounted pool lamp	DLX-YC230-A	D230*H48	LED	6W	AC12V	Irradiation area widen The light is downy and No dazzling	ABS+PC
				9W			
				12W			
				18W			



**MODEL:DLX-YC230-3A**

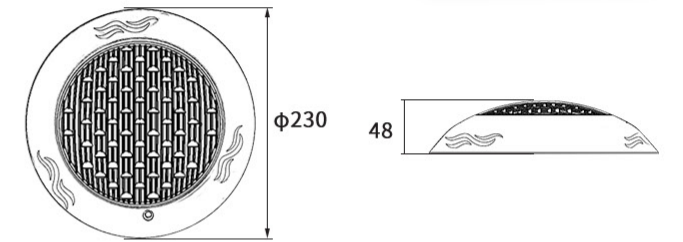


-  Lamp lifetime  $\geq 50,000\text{H}$
-  Working temperature  $-20^{\circ}\text{C}\sim 40^{\circ}\text{C}$
-  Waterproof IP68
-  Easy installation
-  High CRI
- 
- 
- 

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Luminous color	Body Material
wall mounted pool lamp	DLX-YC230-3A	D230*H48	LED	6W	AC12V	Irradiation area widen The light is downy and No dazzling	ABS+PC
				9W			
				12W			
				18W			





**MODEL:DLX-YC292-A**

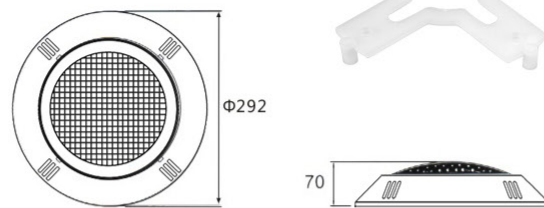


-  Lamp lifetime ≥50,000H
-  Working temperature -20°C~40°C
-  Waterproof IP68
-  Easy installation
-  High CRI
-  CE
-  RoHS
-  FC

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Wall mounted pool lamp	DLX-YC292-A	D292*H70	1PCS/W High Power LED / SMD LED	12W	AC12V	Irradiation long distance and Concentrated light  /  Irradiation area widen The light is downy and No dazzling	ABS+PC
				18W			
				24W			
				25W			
				35W			
				12*3W			
				45W			



**MODEL:DLX-YC280-A**

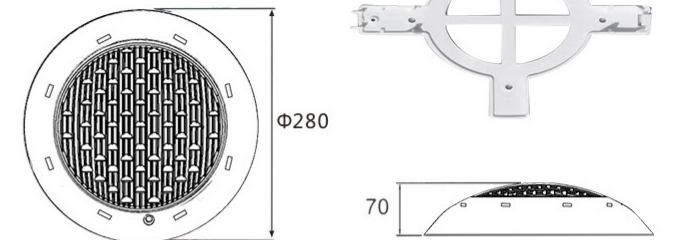



-  Lamp lifetime ≥50,000H
-  Working temperature -20°C~40°C
-  Waterproof IP68
-  Easy installation
-  High CRI
-  CE
-  RoHS
-  FC

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Wall mounted pool lamp	DLX-YC280-A	D280*H70	1PCS/W High Power LED / SMD LED	12W	AC12V	Irradiation long distance and Concentrated light  /  Irradiation area widen The light is downy and No dazzling	ABS+PC
				18W			
				24W			
				25W			
				35W			
				12*3W			
				45W			








MODEL:DLX-QR170-SS

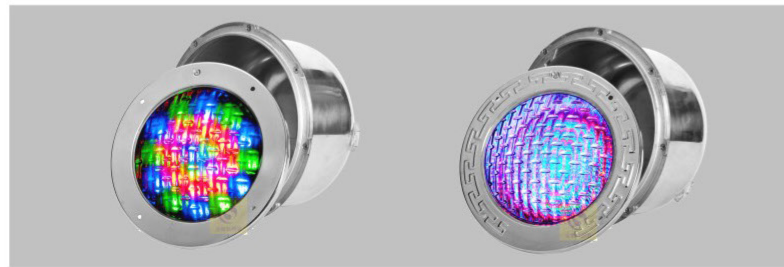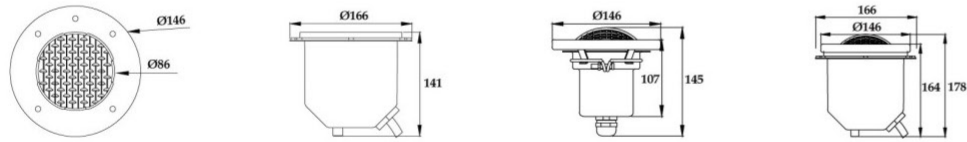


MODEL:DLX-QR290-SS

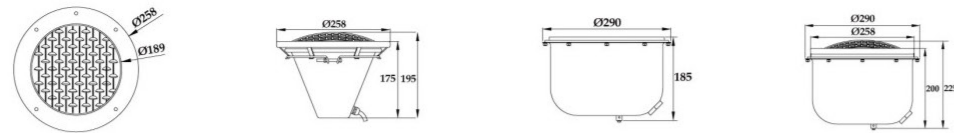

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Embedded Pool Light	DLX-QR170-SS	D170*H196	1PCS/W High Power LED	6W	AC12V	Irradiation long distance and Concentrated light	Stainless Steel 304/316
				9W			
				12W			
				18W			
	DLX-QR290-SS	D290*H225	SMD LED	24W	AC12V	Irradiation area widen The light is downy and No dazzling	
				25W			
				35W			
				45W			

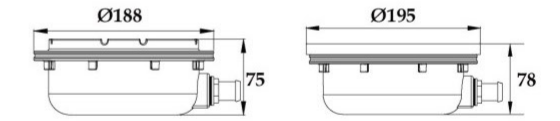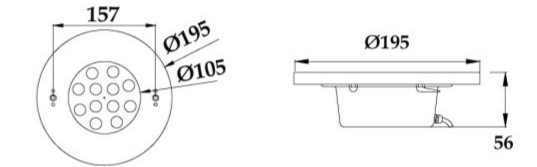

MODEL:DLX-QR195-S

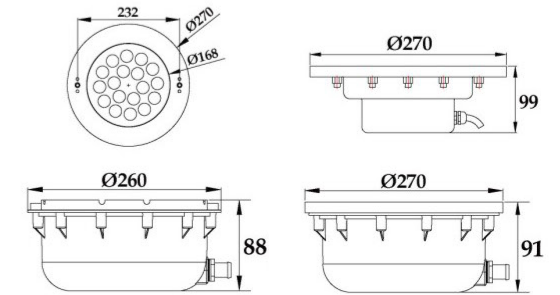

MODEL:DLX-QR270-S




Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Embedded Pool Light	DLX-QR195-S	D195*H75	1PCS/W High Power LED	6W	AC12V	Irradiation long distance and Concentrated light	Electrolyzed Stainless Steel 304/316
				9W			
				12W			
				18W			
	DLX-QR270-S	D270*H118	SMD LED	18W	AC12V	Irradiation area widen The light is downy and No dazzling	
				24W			
				25W			
				35W			
			12*3W				





**MODEL:DLX-QR95-A**

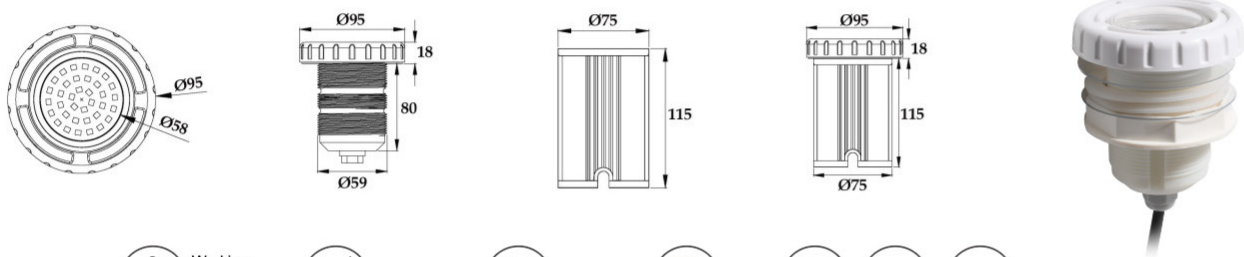


-  Lamp lifetime  $\geq 50,000\text{H}$
-  Working temperature  $-20^{\circ}\text{C}\sim 40^{\circ}\text{C}$
-  Waterproof IP68
-  Easy installation
-  High CRI
- 
- 
- 

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Body Material
Embedded Pool Light	DLX-QR95-A	D95*H115	1PCS/W High Power LED / SMD LED	3W	AC12V	ABS+PC embedded parts
				6W		
				9W		



**MODEL:DLX-QR290-A**

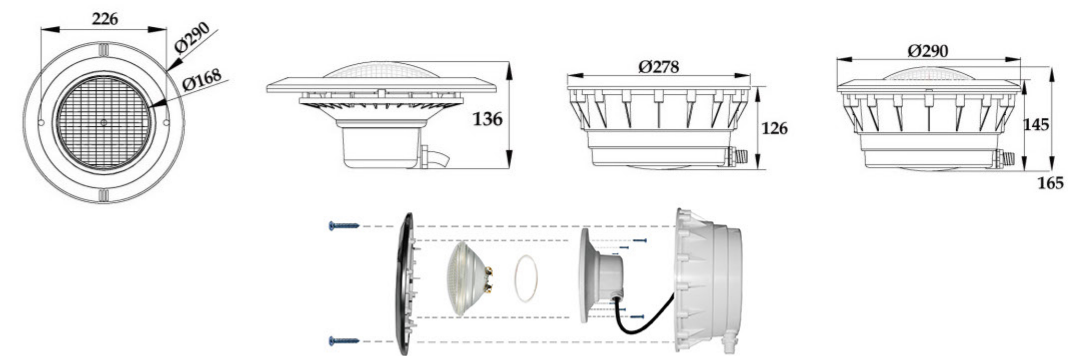


-  Lamp lifetime  $\geq 50,000\text{H}$
-  Working temperature  $-20^{\circ}\text{C}\sim 40^{\circ}\text{C}$
-  Waterproof IP68
-  Easy installation
-  High CRI
- 
- 
- 

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Embedded Pool Light	DLX-QR290-A	D290*H168	1PCS/W High Power LED / SMD LED	12W	AC12V	Irradiation long distance and Concentrated light / Irradiation area widen The light is downy and No dazzling	ABS+PC embedded parts
				18W			
				24W			
				25W			
				35W			
45W							





**MODEL:DLX-QR280-AP**

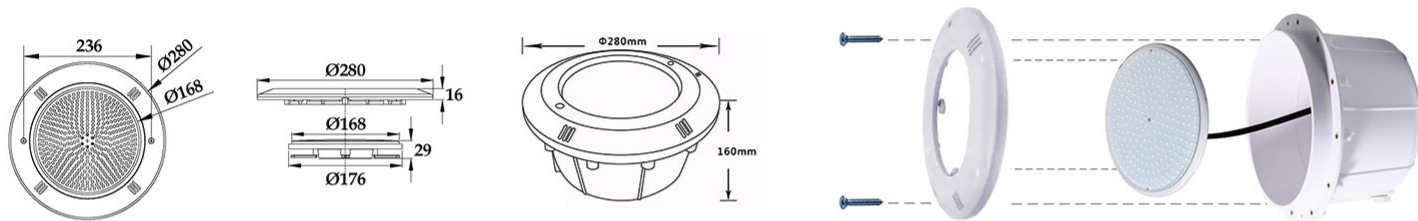

- Lamp lifetime ≥50,000H
- Working temperature -20°C~40°C
- Waterproof IP68
- Easy installation
- High CRI
- 
- 
- 

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Luminous color	Body Material
Embedded Pool Light	DLX-QR280-AP	D280*H160	SMD LED	18W	AC12V	Irradiation area widen The light is downy and No dazzling	ABS+Resin filled
				25W			
				35W			



**MODEL:DLX-QR280-A**




- Lamp lifetime ≥50,000H
- Working temperature -20°C~40°C
- Waterproof IP68
- Easy installation
- High CRI
- 
- 
- 

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Luminous color	Body Material
Embedded Pool Light	DLX-QR280-A	D280*H160	SMD LED	12W	AC12V	Irradiation area widen The light is downy and No dazzling	ABS+Glass
				18W			
				25W			
				35W			
				45W			






MODEL:DLX-YC220-5AP

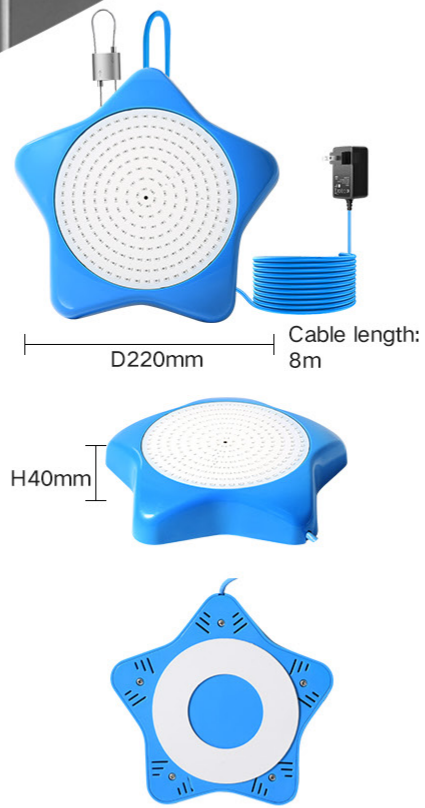

- Lamp lifetime ≥50,000H
- Working temperature -20°C~40°C
- Waterproof IP68
- Easy installation
- High CRI
- CE
- RoHS
- FC

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Resin Filled Wall Mounted LED Pool Light	DLX-YC220-5AP	D220*H40	SMD LED	18W	Input : AC100V -240V Output : DC12V	Irradiation area widen The light is downy and No dazzling	ABS+Resin filled

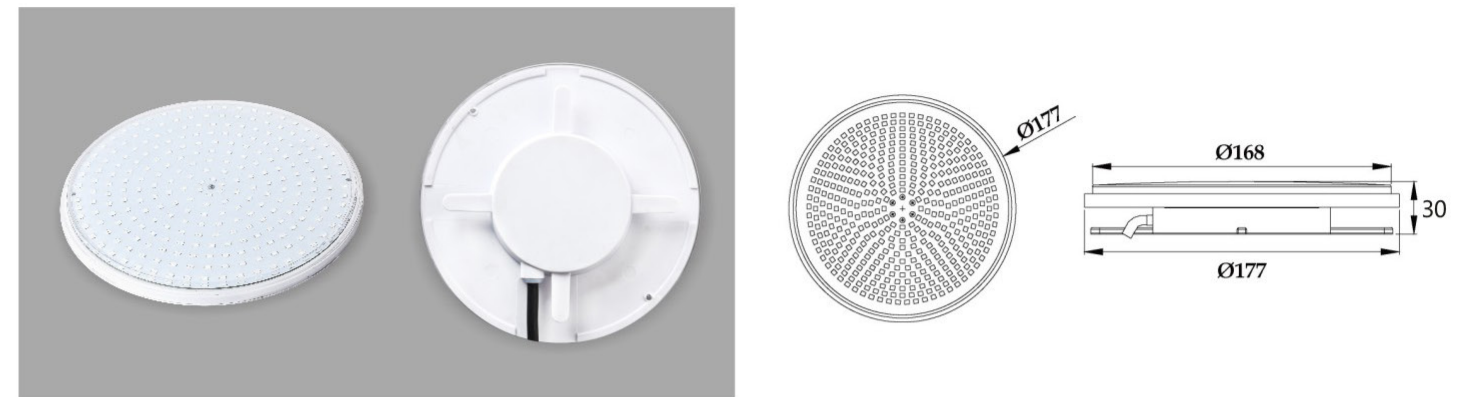


- Lamp lifetime ≥50,000H
- Working temperature -20°C~40°C
- Waterproof IP68
- Easy installation
- High CRI
- CE
- RoHS
- FC

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Resin Filled LED Pool Light	DLX-P56-AP	D177*H30	SMD LED	18W	AC12V	Irradiation area widen The light is downy and No dazzling	ABS+pctransp arency cover
				25W			
				35W			





**MODEL:DLX-P56-TG**

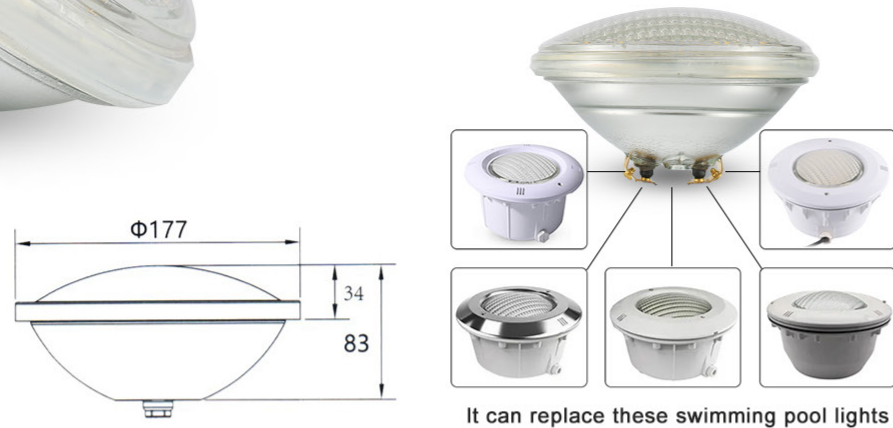


It can replace these swimming pool lights

- Lamp lifetime ≥50,000H
- Working temperature -20°C~40°C
- Waterproof IP68
- Easy installation
- High CRI
- 
- 
- 

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
P56 Pool Light	DLX-P56-TG	D177*H83	1PCS/W High Power LED / SMD LED	12W	AC12V	Irradiation long distance and Concentrated light / Irradiation area widen The light is downy and No dazzling	Glass
				18W			
				24W			
				25W			
				35W			
				45W			



**MODEL:DLX-P36-G**

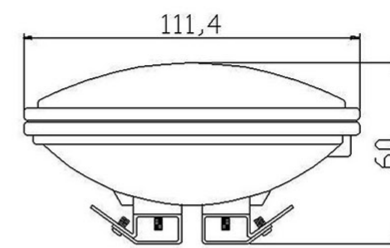


- Lamp lifetime ≥50,000H
- Working temperature -20°C~40°C
- Waterproof IP68
- Easy installation
- High CRI
- 
- 
- 

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Luminous color	Body Material
P36 Pool Light	DLX-P36-G	D111.4*H60	SMD LED	5W	AC12V	Irradiation area widen The light is downy and No dazzling	Glass
				7W			
				9W			





**MODEL:DLX-P56-SS**


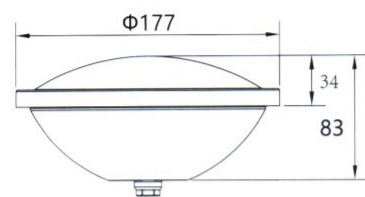


- Lamp lifetime ≥50,000H
- Working temperature -20°C~40°C
- Waterproof IP68
- Easy installation
- High CRI
- 
- 
- 

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
P56 Pool Light	DLX-P56-SS	D177*H83	1PCS/W High Power LED / SMD LED	12W	AC12V	Irradiation long distance and Concentrated light  /  Irradiation area widen The light is downy and No dazzling	Stainless steel 304/316
				18W			
				24W			
				25W			
				35W			
				45W			



**MODEL:DLX-P56-G**

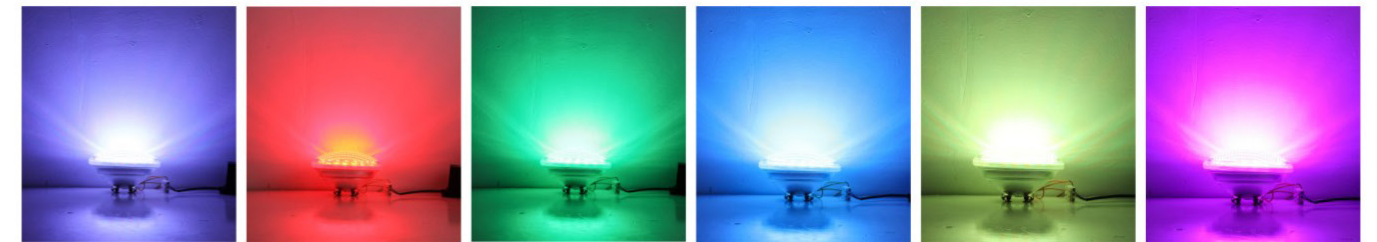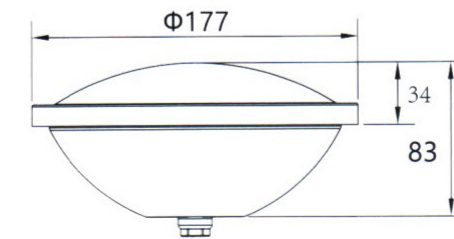


- Lamp lifetime ≥50,000H
- Working temperature -20°C~40°C
- Waterproof IP68
- Easy installation
- High CRI
- 
- 
- 

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
P56 Pool Light	DLX-P56-G	D177*H83	1PCS/W High Power LED / SMD LED	12W	AC12V	Irradiation long distance and Concentrated light  /  Irradiation area widen The light is downy and No dazzling	Glass
				18W			
				24W			
				25W			
				35W			
				45W			





**MODEL:DLX-P56-A**

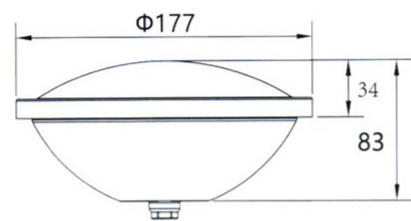


-  Lamp lifetime ≥50,000H
-  Working temperature -20°C~40°C
-  Waterproof IP68
-  Easy installation
-  High CRI
- 
- 
- 

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
P56 Pool Light	DLX-P56-A	D177*H83	1PCS/W High Power LED / SMD LED	12W	AC12V	Irradiation long distance and Concentrated light  /  Irradiation area widen The light is downy and No dazzling	ABS
				18W			
				24W			
				25W			
				35W			
				45W			



**MODEL:DLX-P56-S**

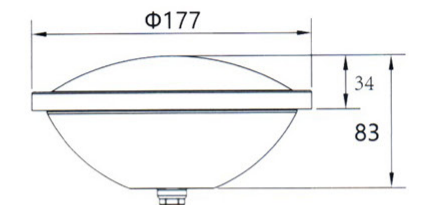



-  Lamp lifetime ≥50,000H
-  Working temperature -20°C~40°C
-  Waterproof IP68
-  Easy installation
-  High CRI
- 
- 
- 

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
P56 Pool Light	DLX-P56-S	D177*H83	1PCS/W High Power LED / SMD LED	12W	AC12V	Irradiation long distance and Concentrated light  /  Irradiation area widen The light is downy and No dazzling	Stainless Steel 304/316
				18W			
				24W			
				25W			
				35W			
				45W			





MODEL:DLX-P38-3A

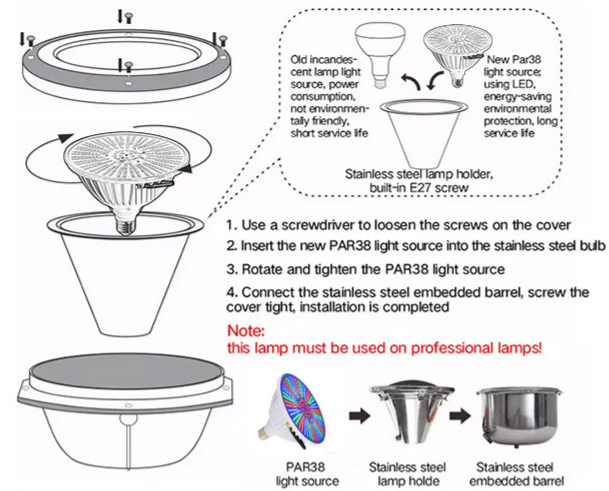
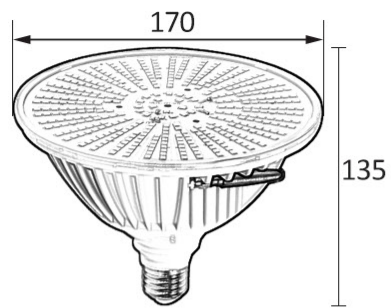


- Lamp lifetime ≥50,000H
- Working temperature -20°C~40°C
- Waterproof IP68
- Easy installation
- High CRI
- CE
- RoHS
- FC

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Luminous color	Body Material
P38 Pool Light	DLX-P38-3A	D170*H135	SMD LED	40W	12V/120V	Irradiation area widen The light is downy and No dazzling	ABS



MODEL:DLX-P38-AS

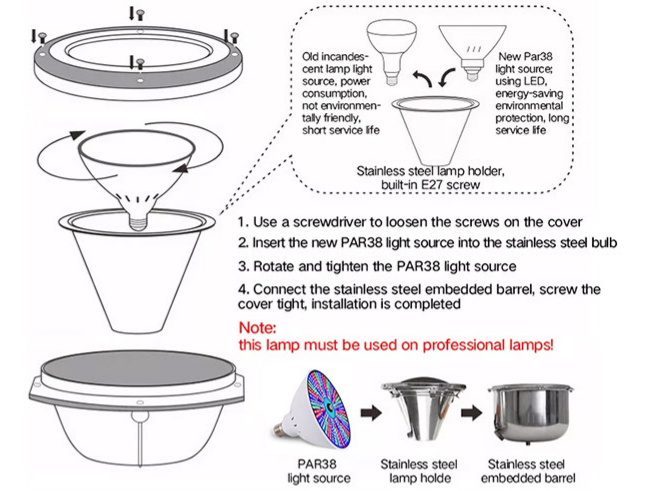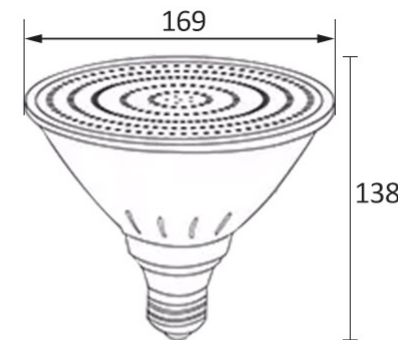

- Lamp lifetime ≥50,000H
- Working temperature -20°C~40°C
- Waterproof IP68
- Easy installation
- High CRI
- CE
- RoHS
- FC

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Luminous color	Body Material
P38 Pool Light	DLX-P38-AS	D169*H138	SMD LED	18W	12V/120V	Irradiation area widen The light is downy and No dazzling	ABS
				25W			
				40W			
















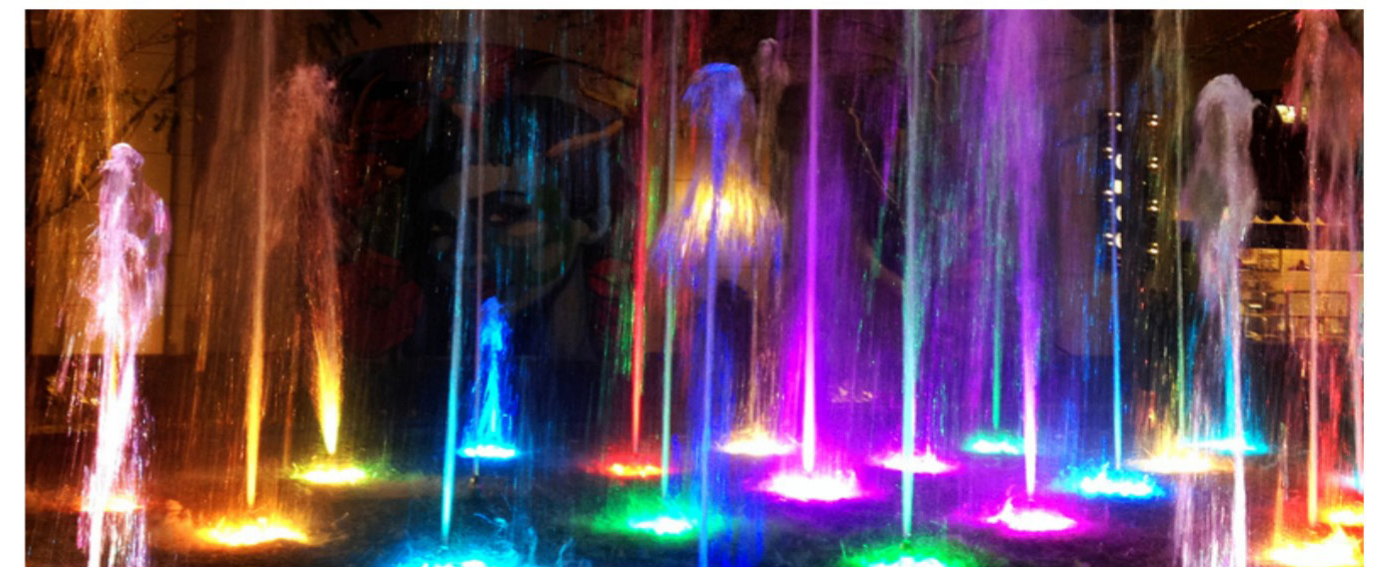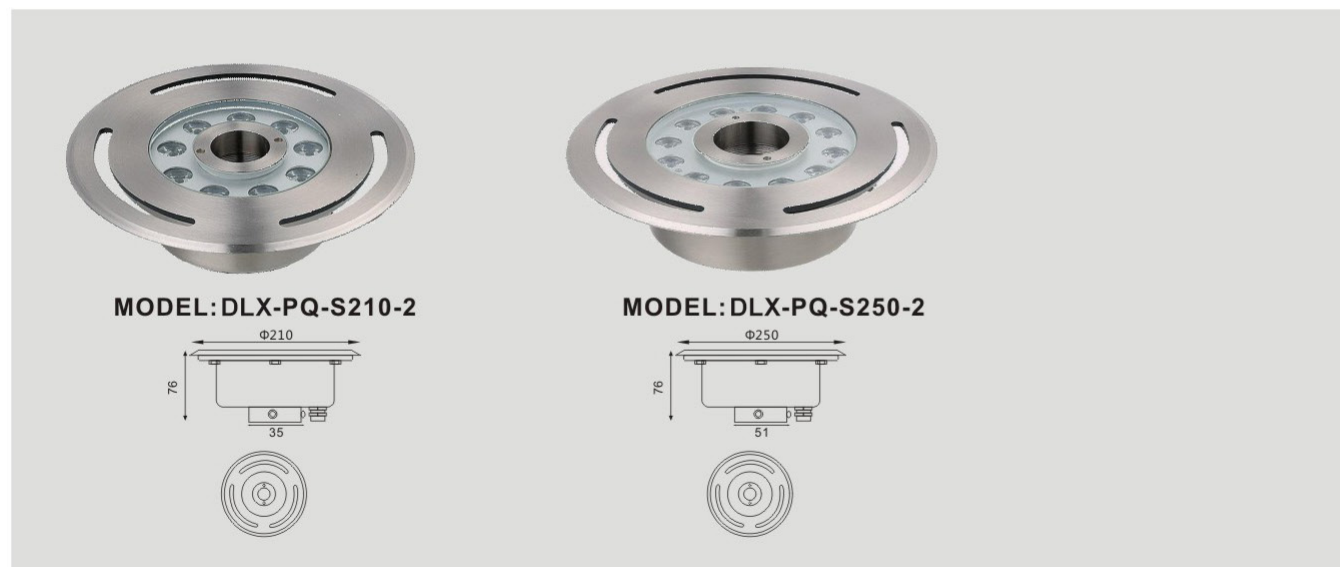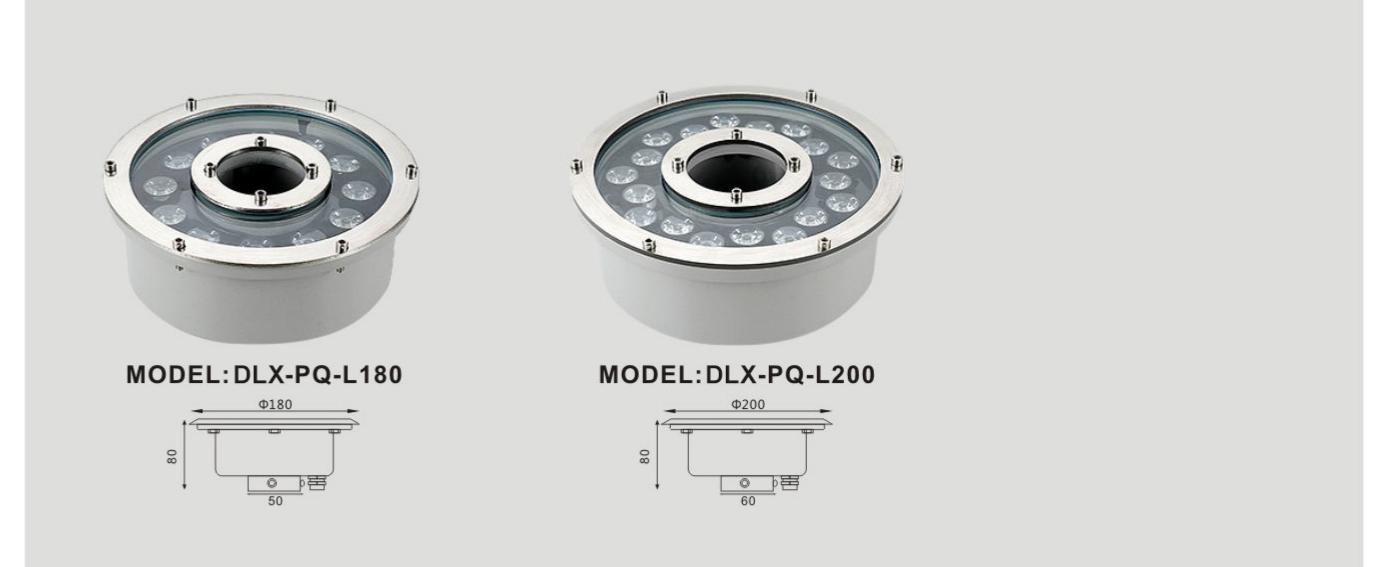
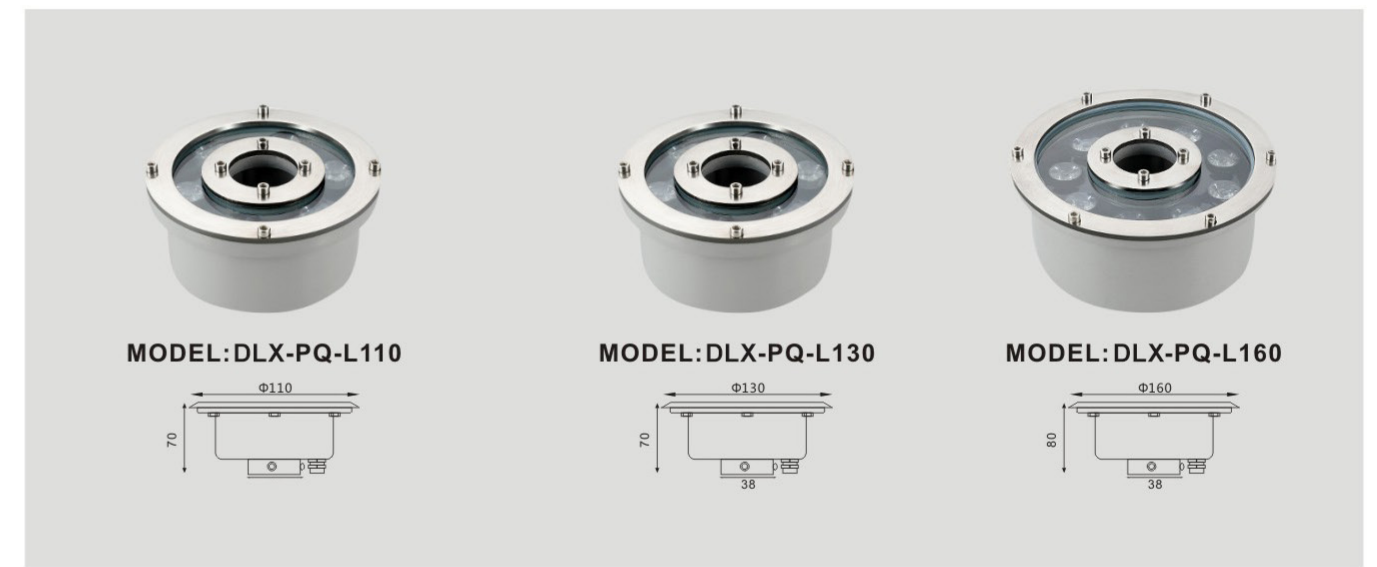




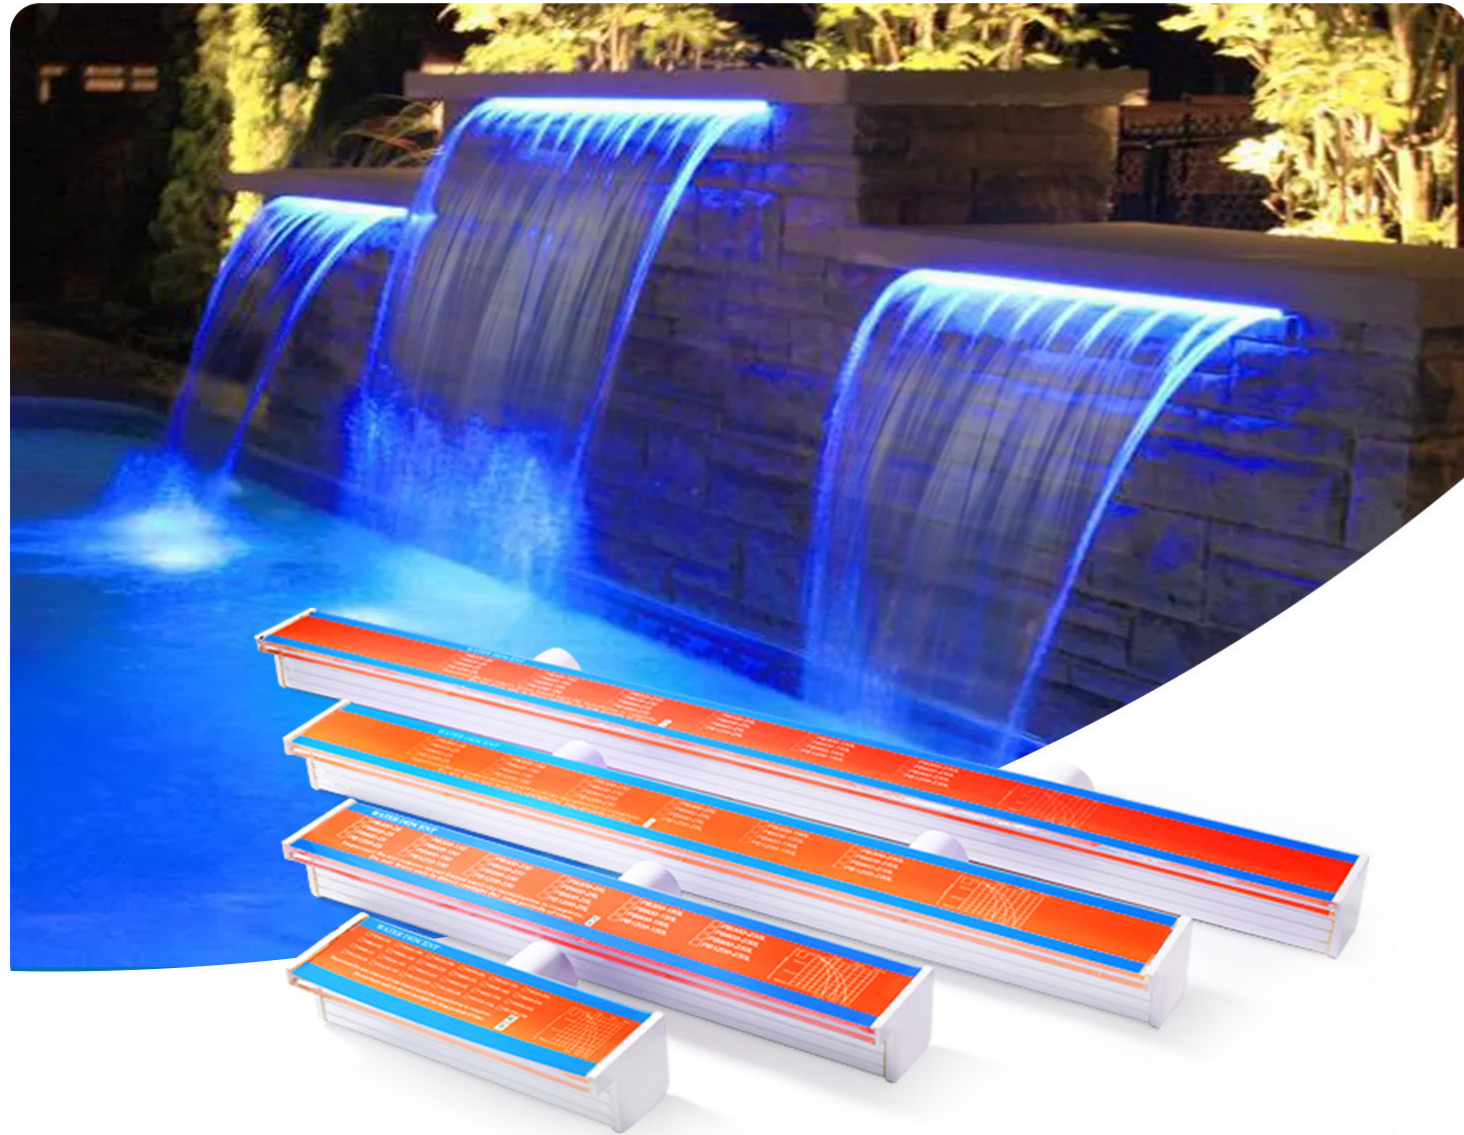

**MODEL:DLX-PB**

**Schematic Diagram**

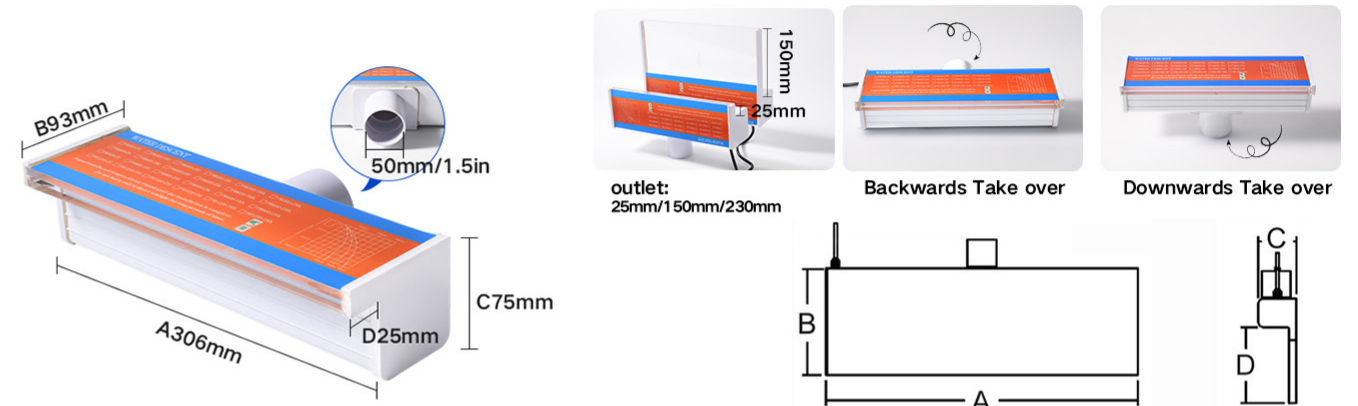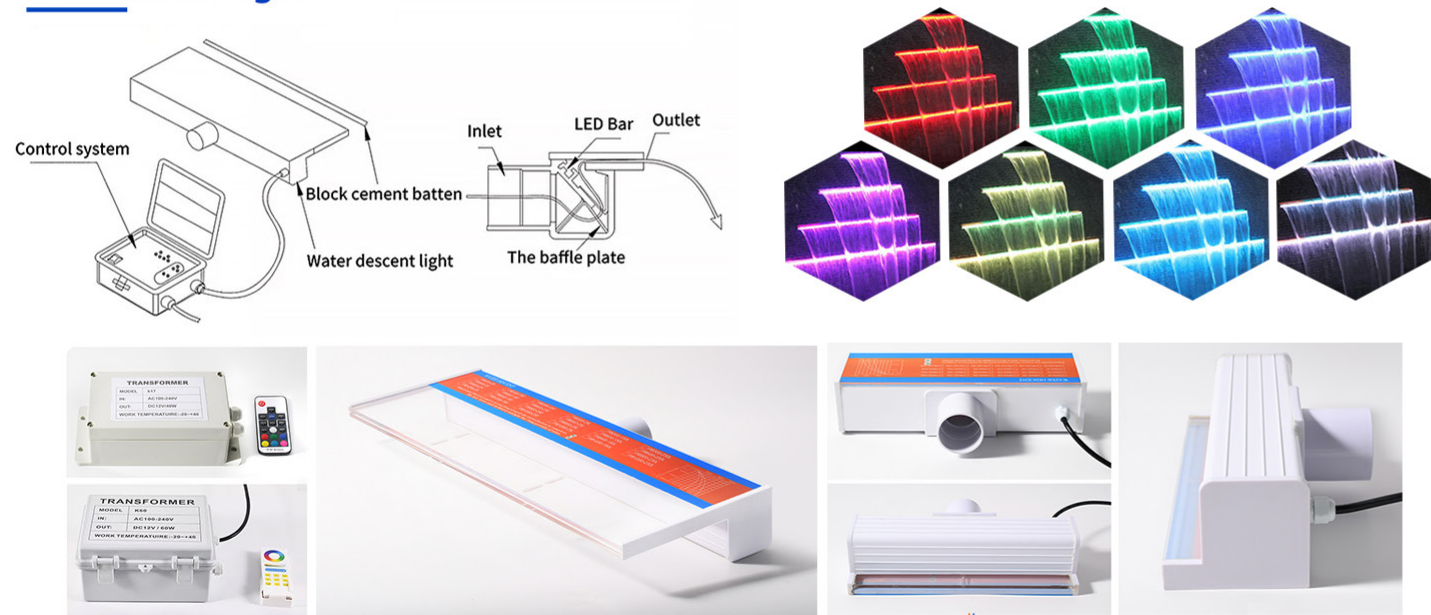

- Lamp lifetime ≥50,000H
- Working temperature -20°C-40°C
- Waterproof IP68
- Easy installation
- High CRI
- CE
- RoHS
- FC

Model NO	Take Over Size mm	A mm	B mm	C mm	D mm	Power	Voltage
----------	-------------------	------	------	------	------	-------	---------


With LED light								
PB300-25(L)	1.5 inch	50mm	306	93	75	25	4W	DC12V
PB300-150(L)	1.5 inch	50mm	306	218	75	150	4W	DC12V
PB300-230(L)	1.5 inch	50mm	306	298	75	230	4W	DC12V
PB600-25(L)	1.5 inch	50mm	606	93	75	25	8W	DC12V
PB600-150(L)	1.5 inch	50mm	606	218	75	150	8W	DC12V
PB600-230(L)	1.5 inch	50mm	606	298	75	230	8W	DC12V
PB900-25(L)	1.5 inch	50mm	906	93	75	25	12W	DC12V
PB900-150(L)	1.5 inch	50mm	906	218	75	150	12W	DC12V
PB900-230(L)	1.5 inch	50mm	906	298	75	230	12W	DC12V
PB1200-25(L)	1.5 inch	50mm	1206	93	75	25	17W	DC12V
PB1200-150(L)	1.5 inch	50mm	1206	218	75	150	17W	DC12V
PB1200-230(L)	1.5 inch	50mm	1206	298	75	230	17W	DC12V
PB1500-25(L)	1.5 inch	50mm	1506	93	75	25	21W	DC12V
PB1500-150(L)	1.5 inch	50mm	1506	218	75	150	21W	DC12V
PB1500-230(L)	1.5 inch	50mm	1506	298	75	230	21W	DC12V

Without LED Light								
PB300-25	1.5 inch	50mm	306	93	75	25	—	—
PB300-150	1.5 inch	50mm	306	218	75	150	—	—
PB300-230	1.5 inch	50mm	306	298	75	230	—	—
PB600-25	1.5 inch	50mm	606	93	75	25	—	—
PB600-150	1.5 inch	50mm	606	218	75	150	—	—
PB600-230	1.5 inch	50mm	606	298	75	230	—	—
PB900-25	1.5 inch	50mm	906	93	75	25	—	—
PB900-150	1.5 inch	50mm	906	218	75	150	—	—
PB900-230	1.5 inch	50mm	906	298	75	230	—	—
PB1200-25	1.5 inch	50mm	1206	93	75	25	—	—
PB1200-150	1.5 inch	50mm	1206	218	75	150	—	—
PB1200-230	1.5 inch	50mm	1206	298	75	230	—	—
PB1500-25	1.5 inch	50mm	1506	93	75	25	—	—
PB1500-150	1.5 inch	50mm	1506	218	75	150	—	—
PB1500-230	1.5 inch	50mm	1506	298	75	230	—	—





### MODEL:DLX-PB-2

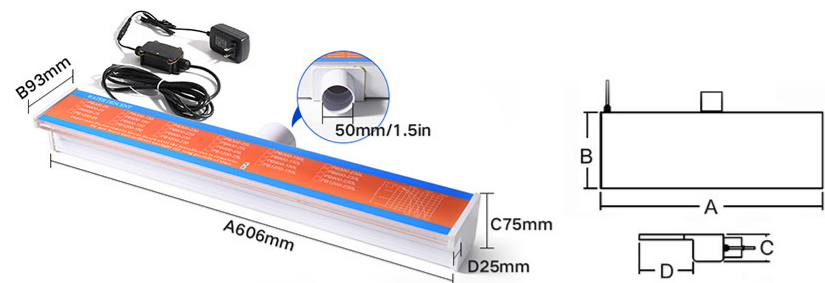


A variety of plug specifications to choose from




Model NO	Take Over Size mm	A mm	B mm	C mm	D mm	Power	Voltage
With LED light							
PB300-25(L)	1.5 inch	50mm	306	93	75	4W	Output : DC12V Input: AC100-240V
PB300-150(L)	1.5 inch	50mm	306	218	75	4W	
PB300-230(L)	1.5 inch	50mm	306	298	75	4W	
PB600-25(L)	1.5 inch	50mm	606	93	75	8W	Output : DC12V Input: AC100-240V
PB600-150(L)	1.5 inch	50mm	606	218	75	8W	
PB600-230(L)	1.5 inch	50mm	606	298	75	8W	
PB900-25(L)	1.5 inch	50mm	906	93	75	12W	Output : DC12V Input: AC100-240V
PB900-150(L)	1.5 inch	50mm	906	218	75	12W	
PB900-230(L)	1.5 inch	50mm	906	298	75	12W	
PB1200-25(L)	1.5 inch	50mm	1206	93	75	17W	Output : DC12V Input: AC100-240V
PB1200-150(L)	1.5 inch	50mm	1206	218	75	17W	
PB1200-230(L)	1.5 inch	50mm	1206	298	75	17W	
PB1500-25(L)	1.5 inch	50mm	1506	93	75	21W	Output : DC12V Input: AC100-240V
PB1500-150(L)	1.5 inch	50mm	1506	218	75	21W	
PB1500-230(L)	1.5 inch	50mm	1506	298	75	21W	

### Installation of waterfall lamp with Valve

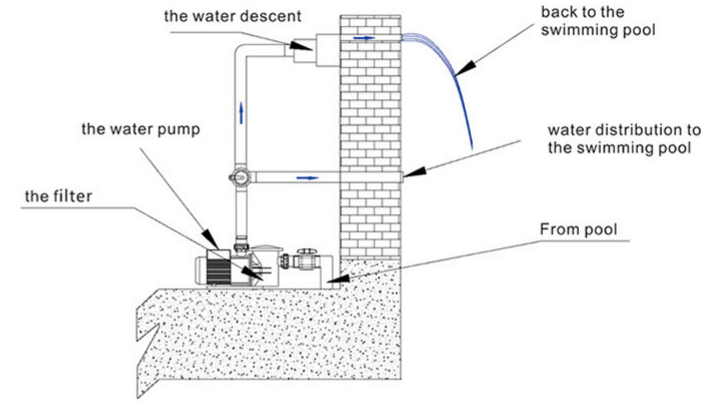


### Installation of multiple waterfall lamps with valves (one valve per waterfall)

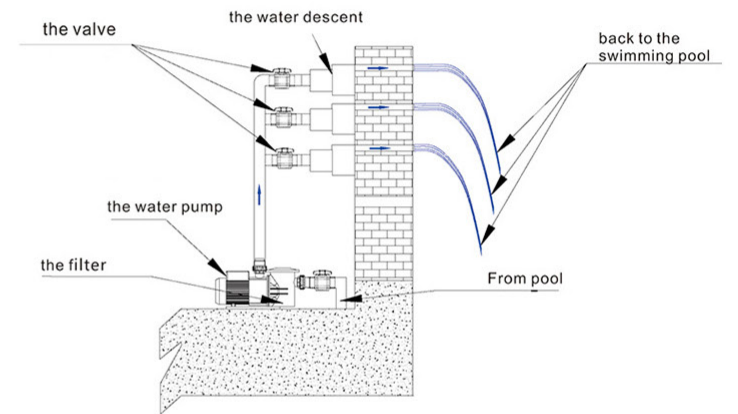


### INSTALLATION FOR WATER DESCENT



EXISTING BUILT WALLS  
PB300-25(L)/PB600-25(L)/PB900-25(L)/PB1200-25(L)/PB300-25/PB600-25/PB900-25/PB1200-25

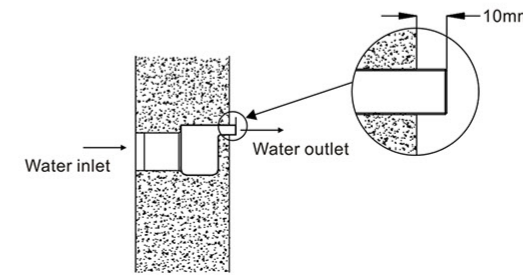

SINGLE BRICK WALLS DURING CONSTRUCTION  
PB300-150(L)/PB600-150(L)/PB900-150(L)/PB1200-150(L)/PB300-150/PB600-150/PB900-150/PB1200-150

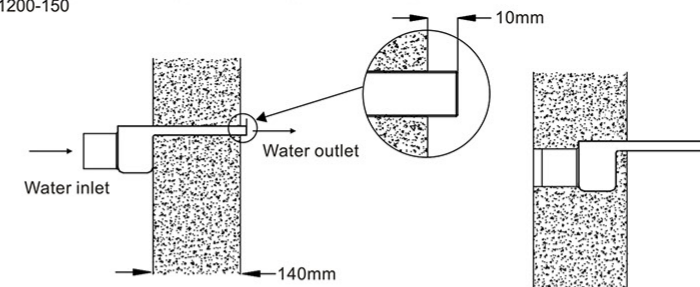


LIMESTONE BLOCK WALLS DURING CONSTRUCTION  
PB300-230(L)/PB600-230(L)/PB900-230(L)/PB1200-230(L)/PB300-230/PB600-230/PB900-230/PB1200-230

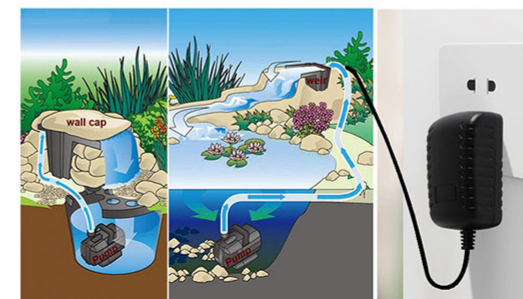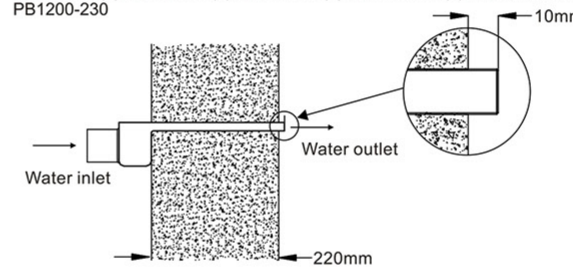


### Technical Information




Schematic diagram of approximate projected waterfall length parameters per 300 mm water sheet.

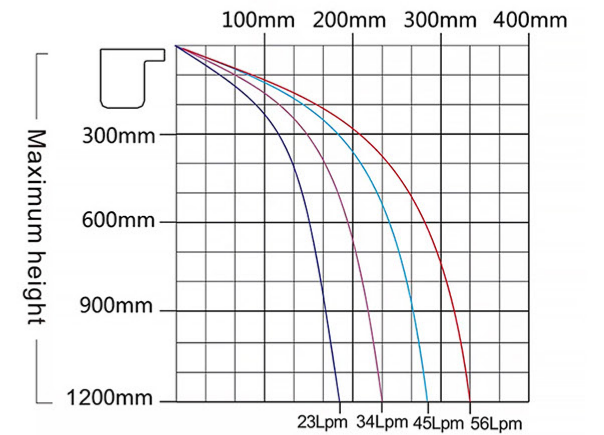

### Build with circulation pumps (110V)

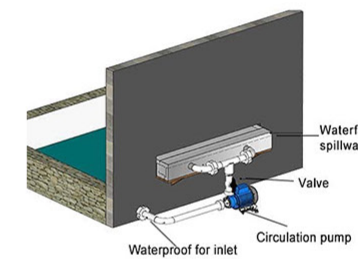

### Build with Submersible Pump (24/48 Volt)

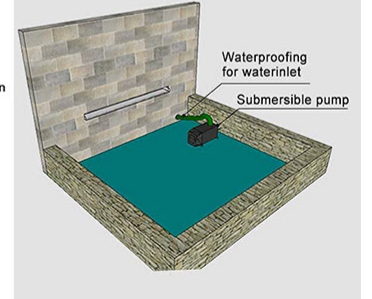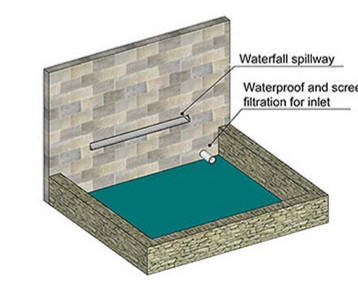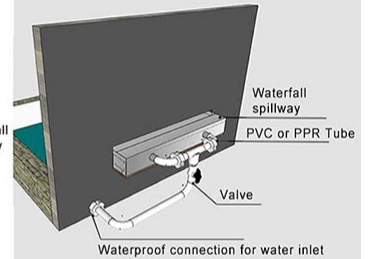







MODEL:DLX-PB-B

### LED Water Descent

- Features, one-piece molding, more sturdy, uniform water output, beautiful and elegant design.
- Acrylic material, high temperature resistance, corrosion resistance, oxidation resistance.
- Constant Water Flow, Uniform and smooth water discharge effect.
- Suitable for villas, courtyards, gardens, pool water curtain walls.

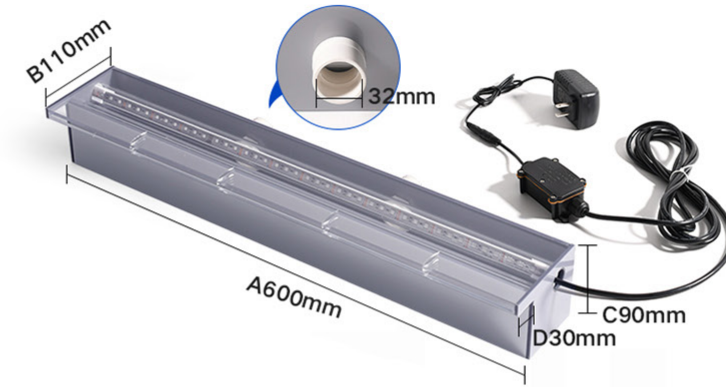

A variety of plug specifications to choose from




Model NO	Take Over Size mm	A mm	B mm	C mm	D mm	Power	Voltage
----------	-------------------	------	------	------	------	-------	---------

With LED light							
PB300-B30(L)	32mm / 50mm	300	110	90	30	4W	Output : DC12V Input: AC100-240V
PB300-B150(L)	32mm / 50mm	300	230	90	150	4W	
PB300-B230(L)	32mm / 50mm	300	310	90	230	4W	
PB600-B30(L)	32mm / 50mm	600	110	90	30	8W	Output : DC12V Input: AC100-240V
PB600-B150(L)	32mm / 50mm	600	230	90	150	8W	
PB600-B230(L)	32mm / 50mm	600	310	90	230	8W	
PB900-B30(L)	32mm / 50mm	900	110	90	30	12W	Output : DC12V Input: AC100-240V
PB900-B150(L)	32mm / 50mm	900	230	90	150	12W	
PB900-B230(L)	32mm / 50mm	900	310	90	230	12W	
PB1200-B30(L)	32mm / 50mm	1200	110	90	30	17W	Output : DC12V Input: AC100-240V
PB1200-B150(L)	32mm / 50mm	1200	230	90	150	17W	
PB1200-B230(L)	32mm / 50mm	1200	310	90	230	17W	
PB1500-B30(L)	32mm / 50mm	1500	110	90	30	21W	Output : DC12V Input: AC100-240V
PB1500-B150(L)	32mm / 50mm	1500	230	90	150	21W	
PB1500-B230(L)	32mm / 50mm	1500	310	90	230	21W	

Without LED light							
PB300-B30	32mm / 50mm	300	110	90	30	—	—
PB300-B150	32mm / 50mm	300	230	90	150	—	—
PB300-B230	32mm / 50mm	300	310	90	230	—	—
PB600-B30	32mm / 50mm	600	110	90	30	—	—
PB600-B150	32mm / 50mm	600	230	90	150	—	—
PB600-B230	32mm / 50mm	600	310	90	230	—	—
PB900-B30	32mm / 50mm	900	110	90	30	—	—
PB900-B150	32mm / 50mm	900	230	90	150	—	—
PB900-B230	32mm / 50mm	900	310	90	230	—	—
PB1200-B30	32mm / 50mm	1200	110	90	30	—	—
PB1200-B150	32mm / 50mm	1200	230	90	150	—	—
PB1200-B230	32mm / 50mm	1200	310	90	230	—	—
PB1500-B30	32mm / 50mm	1500	110	90	30	—	—
PB1500-B150	32mm / 50mm	1500	230	90	150	—	—
PB1500-B230	32mm / 50mm	1500	310	90	230	—	—




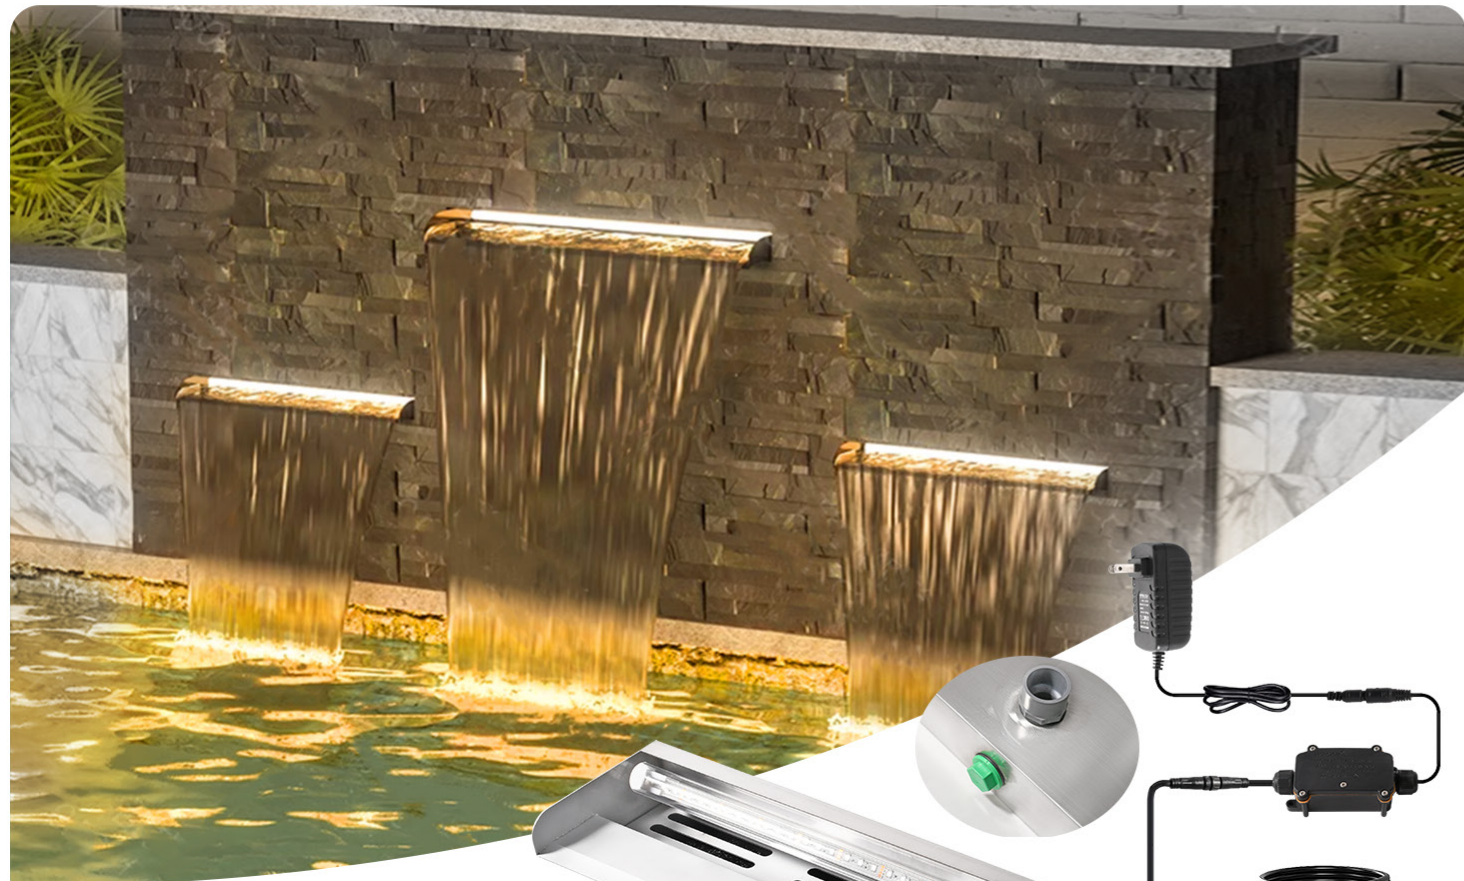



**MODEL:DLX-PB-S**

**Two special water inlet designs**


Both the back and bottom we have designed the inlet, you can choose one for inlet and the other you can close.

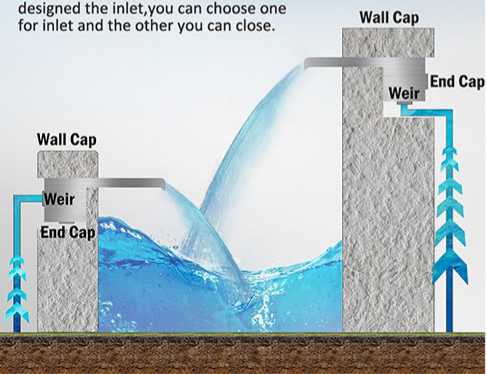

**Either direction for plumbing**

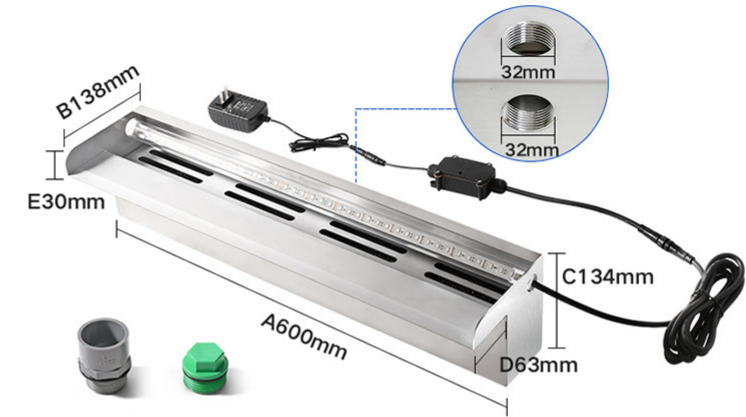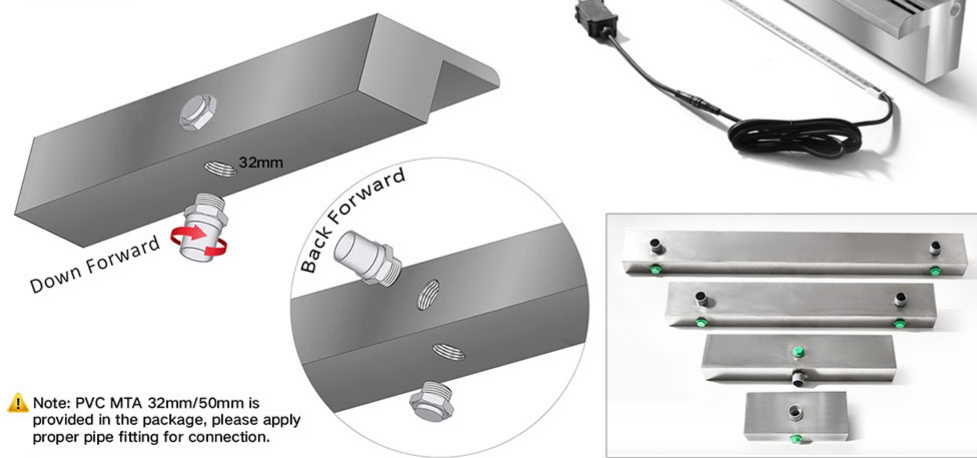

A variety of plug specifications to choose from

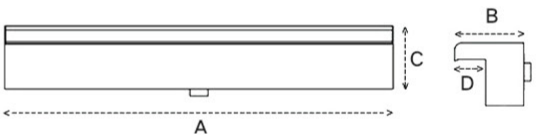

- Lamp lifetime ≥50,000H
- Working temperature -20°C~40°C
- Waterproof IP68
- Easy installation
- High CRI
- CE
- RoHS
- FC

Model NO	Take Over Size mm	A mm	B mm	C mm	D mm	Power	Voltage
----------	-------------------	------	------	------	------	-------	---------



With LED light							
PB300-S63(L)	32mm / 50mm	300	138	134	63	4W	Output : DC12V Input: AC100-240V
PB300-S150(L)	32mm / 50mm	300	225	134	150	4W	
PB300-S230(L)	32mm / 50mm	300	305	134	230	4W	
PB600-S63(L)	32mm / 50mm	600	138	134	63	8W	Output : DC12V Input: AC100-240V
PB600-S150(L)	32mm / 50mm	600	225	134	150	8W	
PB600-S230(L)	32mm / 50mm	600	305	134	230	8W	
PB900-S63(L)	32mm / 50mm	900	138	134	63	12W	Output : DC12V Input: AC100-240V
PB900-S150(L)	32mm / 50mm	900	225	134	150	12W	
PB900-S230(L)	32mm / 50mm	900	305	134	230	12W	
PB1200-S63(L)	32mm / 50mm	1200	138	134	63	17W	Output : DC12V Input: AC100-240V
PB1200-S150(L)	32mm / 50mm	1200	225	134	150	17W	
PB1200-S230(L)	32mm / 50mm	1200	305	134	230	17W	
PB1500-S63(L)	32mm / 50mm	1500	138	134	63	21W	Output : DC12V Input: AC100-240V
PB1500-S150(L)	32mm / 50mm	1500	225	134	150	21W	
PB1500-S230(L)	32mm / 50mm	1500	305	134	230	21W	

Without LED light							
PB300-S63	32mm / 50mm	300	138	134	63	—	—
PB300-S150	32mm / 50mm	300	225	134	150	—	—
PB300-S230	32mm / 50mm	300	305	134	230	—	—
PB600-S63	32mm / 50mm	600	138	134	63	—	—
PB600-S150	32mm / 50mm	600	225	134	150	—	—
PB600-S230	32mm / 50mm	600	305	134	230	—	—
PB900-S63	32mm / 50mm	900	138	134	63	—	—
PB900-S150	32mm / 50mm	900	225	134	150	—	—
PB900-S230	32mm / 50mm	900	305	134	230	—	—
PB1200-S63	32mm / 50mm	1200	138	134	63	—	—
PB1200-S150	32mm / 50mm	1200	225	134	150	—	—
PB1200-S230	32mm / 50mm	1200	305	134	230	—	—
PB1500-S63	32mm / 50mm	1500	138	134	63	—	—
PB1500-S150	32mm / 50mm	1500	225	134	150	—	—
PB1500-S230	32mm / 50mm	1500	305	134	230	—	—





MODEL:DLX-DD01

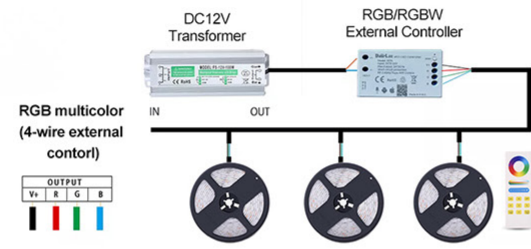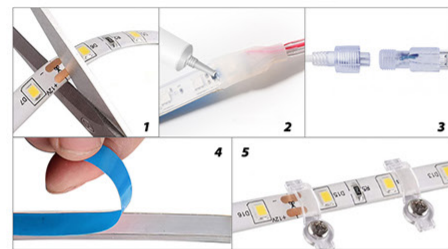

- Lamp lifetime ≥50,000H
- Working temperature -20°C~40°C
- Waterproof IP68
- Easy installation
- High CRI
- CE
- RoHS
- FC

Product	Model	Size(mm)	Length(m)	Power	Working Voltage	Cutting method	LED Chips per meter	Waterproof grade	Body Material
Silicone soft Underwater LED strip light	DLX-DD01	Wide:12 Thick:5.5	12V: 5 Meters/roll 24V: 10 Meters/roll	12W/m	DC12V DC24V	5cm one cut	2835 SMD : 120 Chips/meter 5050 SMD: 60 Chips/meter	IP68	Silica gel



13W ø25\*H172mm    13W ø28\*H175mm    100W ø45\*H225mm    200W ø55\*H250mm    300W ø80\*H410mm




- Lamp lifetime ≥50,000H
- Working temperature -20°C~40°C
- Waterproof IP68
- Easy installation
- High CRI
- CE
- RoHS
- FC

Product	Model	Power	Working Voltage	Emitting Color	Wire Length	Type of diode	Waterproof grade	Body Material
Underwater Submersible Night Boat Fishing Lights	DLX-JY	13W 20W 30W 60W 100W 200W 300W 400W 500W	AC/DC 12-24V	White Green Blue Yellow RED	5m	SMD LED	IP68	ABS+ PC +Stainless steel





MODEL:DLX-BY

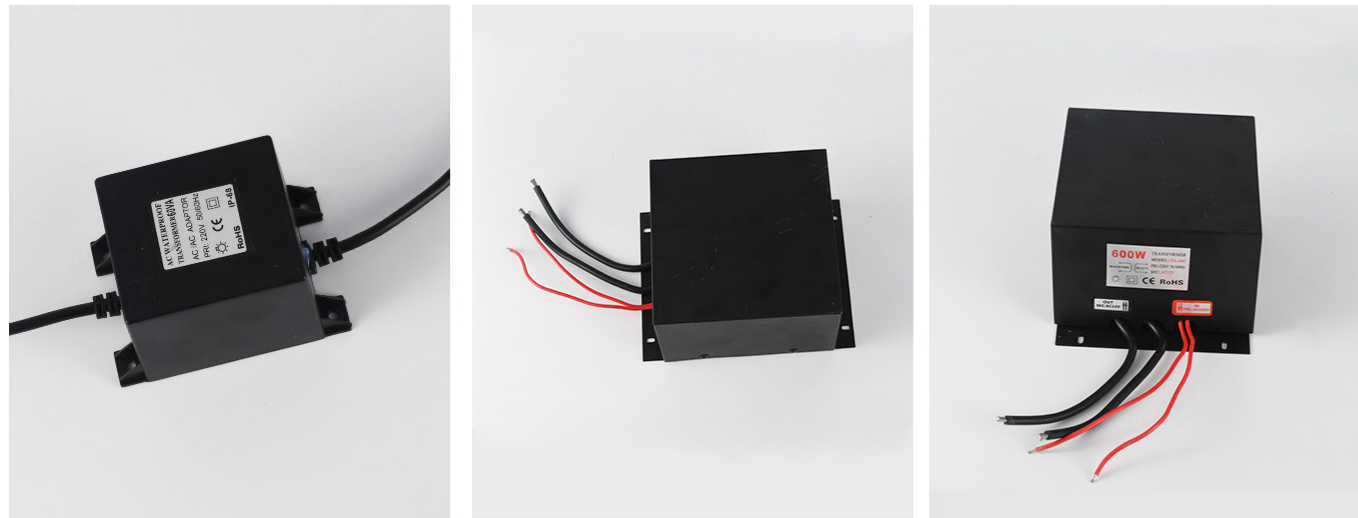


Product	Model	Power	Size(mm)	Working Voltage	Body Material	Waterproof grade
Transformer	DLX-BY	30W	105*70*75	AC12V/24V	Plastic+ thick copper wire	IP68
		60W	110*70*75			
		80W	110*70*75			
		105W	178*126*65			
		160W	198*126*65			
		200W	197*135*70			
		300W	190*140*75			
		400W	190*140*75			
		500W	225*150*80			
		600W	155*150*100			
		800W	188*188*115			
1000W	188*188*115					



MODEL:DLX-JX



MODEL:DLX-JX-S

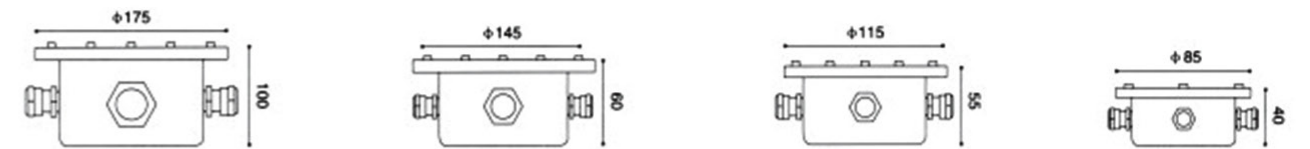

Product	Model	Hole	Size(mm)	Wire diameter	Body Material	Waterproof grade
Terminal Box	DLX-JX-S	2	D85*H40	7.5mm	304 stainless steel	IP68
		3	D85*H40			
		4	D85*H40			
		5	D115*H55			
		6	D120*H55			
		7	D145*H55			
		8	D145*H55			
		9	D145*H55			
		10	D175*H100			
		11	D175*H100			
		12	D175*H100			